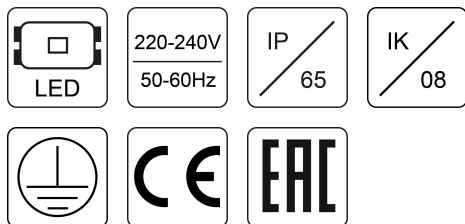


**GEMINI 3PLED D549 CLR TEST • 1023563**

Product:	Gemini 3PLED D549 CLR TEST
Order code:	1023563
Family:	Gemini LED
Product group:	Emergency lighting

**GENERAL DATA**

<b>Description:</b>	A surface LED emergency exit sign with IP65 degree of protection and compact housing for both mains and emergency operations Diffuser: clear polycarbonate, impact resistant Body: polycarbonate, white finish, with LED status indicator and test button Battery charging time: 24 hours Battery: NiCd Recognition distance: 16 meters
<b>Installation:</b>	Designed to be fixed onto walls of any type, including flammable surfaces. Supplied with legend kit ("Exit", "Left" and "Right"). Push-in terminal, 3x2x2.5mm <sup>2</sup>
<b>Environment</b>	Indoor
<b>Application</b>	emergency lighting

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 50-60Hz	<b>System power*, W:</b>	1
<b>Power factor:</b>	0.3	<b>Control gear:</b>	ECG on/off
<b>Illumination mode:</b>	M/NM	<b>Emergency operating time, h:</b>	3
<b>Connection:</b>	Push-in terminal, 3x2x2.5mm <sup>2</sup>		

**LIGHTING DATA**


<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>CRI (Ra):</b>	70+	<b>CCT, K:</b>	6500
<b>LED lifetime, h:</b>	50000/L70B50		

**TECHNICAL DATA**

<b>Net weight, kg:</b>	0.5	<b>Quantity in package, pcs:</b>	1
<b>Packaging volume, m<sup>3</sup>/pcs:</b>	0.0024864	<b>Pallet quantity, pcs:</b>	310

**STANDARDS**

<b>Operating temperature range, °C:</b>	ta 0...+40	<b>Protection class IEC:</b>	I
<b>Ingress protection code:</b>	IP65	<b>Mechanical impact resistance:</b>	IK08
<b>Certificates:</b>	CE, RoHS	<b>Warranty:</b>	2 years
<b>Technical drawing (.jpg)</b>			

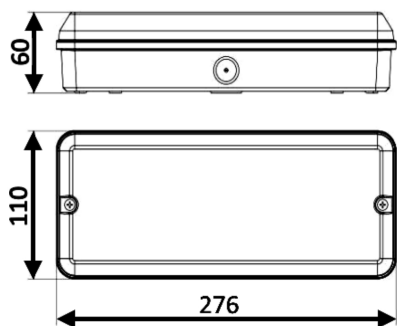

Date of issue: 2020-11-16 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ [info@northcliffe.org](mailto:info@northcliffe.org) ■ [www.northcliffe.org](http://www.northcliffe.org)