




# ESC 3 EMERGENCY EXIT LIGHTS



The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

The product codes starting with letter Y include an individually packed luminaire, and the pictogram/s mentioned in the table. The product codes starting with TW include the luminaire only.

## ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY EXIT LIGHTS

Product Code	Nominal Supply Voltage	Pictogram	Pictogram Info
TW39781K	220-240 V, 50/60 Hz AC, DC		1-sided, 70 m
TW39782K	220-240 V, 50/60 Hz AC, DC		2-sided, 70 m
TW49481K	220-240 V, 50/60 Hz AC, DC		1-sided, 120 m

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/emergency-exit-lights/emergency-exit-light-product-families/esc-3-emergency-exit-lights](http://www.teknoware.com/en/emergency-lighting/emergency-exit-lights/emergency-exit-light-product-families/esc-3-emergency-exit-lights)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	Nominal Supply Voltage	Pictogram	Pictogram Info
TW49482K	220-240 V, 50/60 Hz AC, DC		2-sided, 120 m

## NON-ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY EXIT LIGHTS

Product Code	Nominal Supply Voltage	Pictogram	Pictogram Info
TW39781	220-240 V, 50/60 Hz AC, DC		1-sided, 70 m
TW39782	220-240 V, 50/60 Hz AC, DC		2-sided, 70 m
TW49481	220-240 V, 50/60 Hz AC, DC		1-sided, 120 m
TW49482	220-240 V, 50/60 Hz AC, DC		2-sided, 120 m

## NON-ADDRESSABLE 24 V CENTRALLY SUPPLIED EMERGENCY EXIT LIGHTS

Product Code	Nominal Supply Voltage	Pictogram	Pictogram Info
TW39722	24 V, 50/60 Hz AC, DC		1-sided, 70 m
TW39723	24 V, 50/60 Hz AC, DC		2-sided, 70 m
TW49422	24 V, 50/60 Hz AC, DC		1-sided, 120 m
TW49423	24 V, 50/60 Hz AC, DC		2-sided, 120 m

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: February 27, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/emergency-exit-lights/emergency-exit-light-product-families/esc-3-emergency-exit-lights](http://www.teknoware.com/en/emergency-lighting/emergency-exit-lights/emergency-exit-light-product-families/esc-3-emergency-exit-lights)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# ESC 3 EMERGENCY EXIT LIGHT TW49423



## 24 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.




TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW49423
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004730
ETIM Product Class	EC001957
Length	1259 mm
Width	121 mm
Height	634 mm
Weight	9,8 kg
Max Input Power VA	41 VA
Max Input Power W	37 W
Nominal Supply Voltage	24 V, 50/60 Hz AC, DC
IP Class	IP20
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	120 m
Light Source	FD-36/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	2 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4941E		120	ESC 3 Emergency Exit Lights
PB4942E		120	ESC 3 Emergency Exit Lights
PB4943E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49423](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49423)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

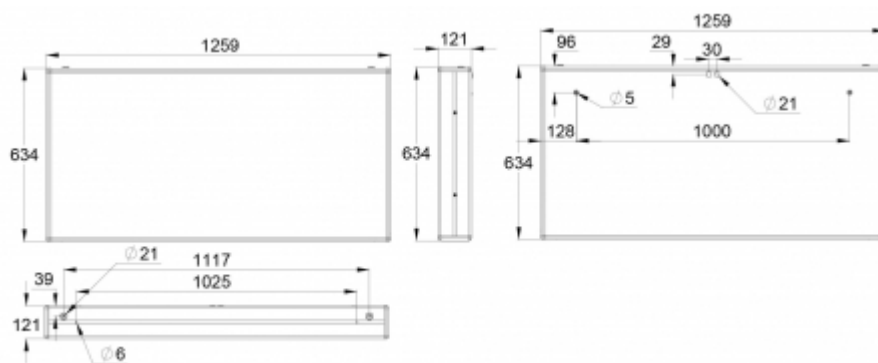


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49423](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49423)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW49422



## 24 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.




TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW49422
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004723
ETIM Product Class	EC001957
Length	1259 mm
Width	121 mm
Height	634 mm
Weight	9,8 kg
Max Input Power VA	41 VA
Max Input Power W	37 W
Nominal Supply Voltage	24 V, 50/60 Hz AC, DC
IP Class	IP20
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	120 m
Light Source	FD-36/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	2 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4941E		120	ESC 3 Emergency Exit Lights
PB4942E		120	ESC 3 Emergency Exit Lights
PB4943E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49422](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49422)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

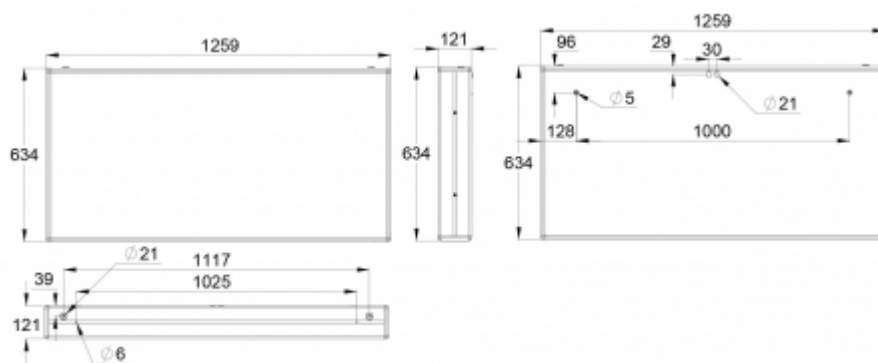


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49422](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49422)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)





# ESC 3 EMERGENCY EXIT LIGHT TW49482



## 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW49482
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045005027
ETIM Product Class	EC001957
Length	1259 mm
Width	121 mm
Height	634 mm
Weight	9,8 kg
Max Input Power VA	38 VA
Max Input Power W	32 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	120 m
Light Source	FD-36/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4941E		120	ESC 3 Emergency Exit Lights
PB4942E		120	ESC 3 Emergency Exit Lights
PB4943E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

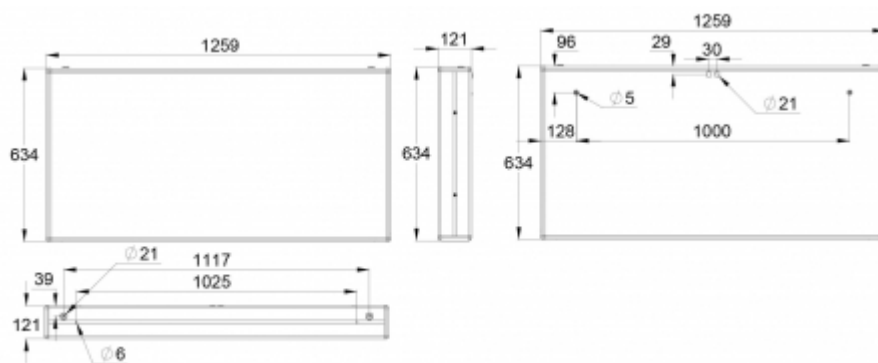


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW49481



## 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW49481
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045005157
ETIM Product Class	EC001957
Length	1259 mm
Width	121 mm
Height	634 mm
Weight	9,8 kg
Max Input Power VA	38 VA
Max Input Power W	32 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	120 m
Light Source	FD-36/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4941E		120	ESC 3 Emergency Exit Lights
PB4942E		120	ESC 3 Emergency Exit Lights
PB4943E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

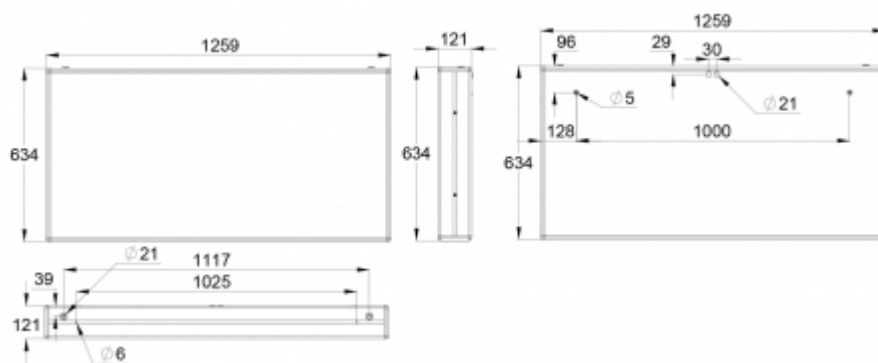

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW49482K



## Addressable 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW49482K
Feature	Tapsa Control
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004754
ETIM Product Class	EC001957
Length	1259 mm
Width	121 mm
Height	634 mm
Weight	9,8 kg
Max Input Power VA	38 VA
Max Input Power W	32 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	120 m
Light Source	FD-36/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4941E		120	ESC 3 Emergency Exit Lights
PB4942E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482k)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4943E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



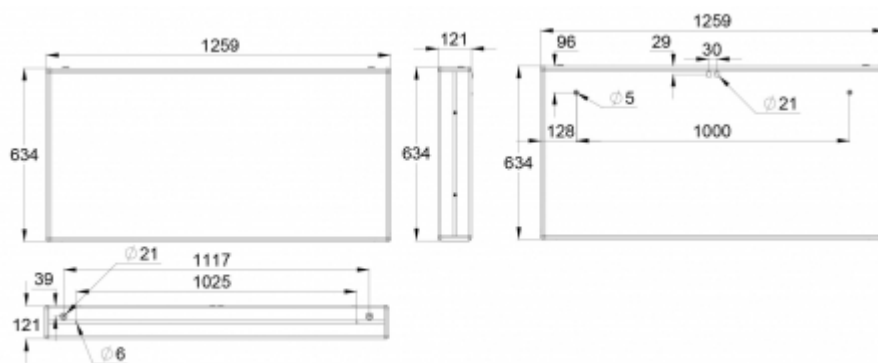

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49482k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW49481K



## Addressable 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW49481K
Feature	Tapsa Control
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004747
ETIM Product Class	EC001957
Length	1259 mm
Width	121 mm
Height	634 mm
Weight	9,8 kg
Max Input Power VA	38 VA
Max Input Power W	32 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	120 m
Light Source	FD-36/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4941E		120	ESC 3 Emergency Exit Lights
PB4942E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481k)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB4943E		120	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



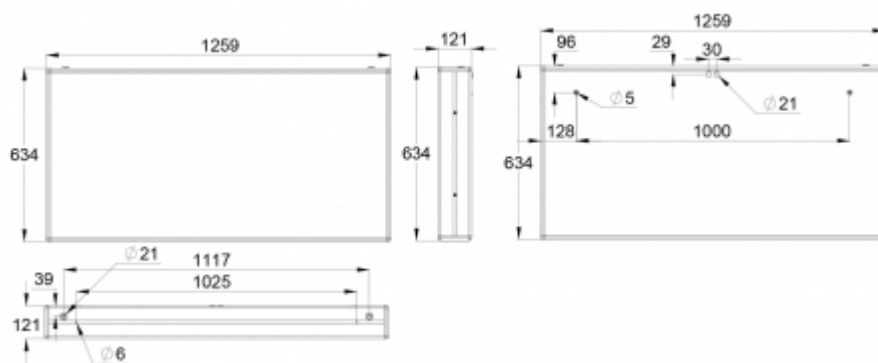


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw49481k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW39723



## 24 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW39723
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004693
ETIM Product Class	EC001957
Length	647 mm
Width	121 mm
Height	391 mm
Weight	4,6 kg
Max Input Power VA	26 VA
Max Input Power W	18 W
Nominal Supply Voltage	24 V, 50/60 Hz AC, DC
Protection Class	II
IP Class	IP44
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	70 m
Light Source	FD-18/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3971E		70	ESC 3 Emergency Exit Lights
PB3972E		70	ESC 3 Emergency Exit Lights
PB3973E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39723](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39723)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)





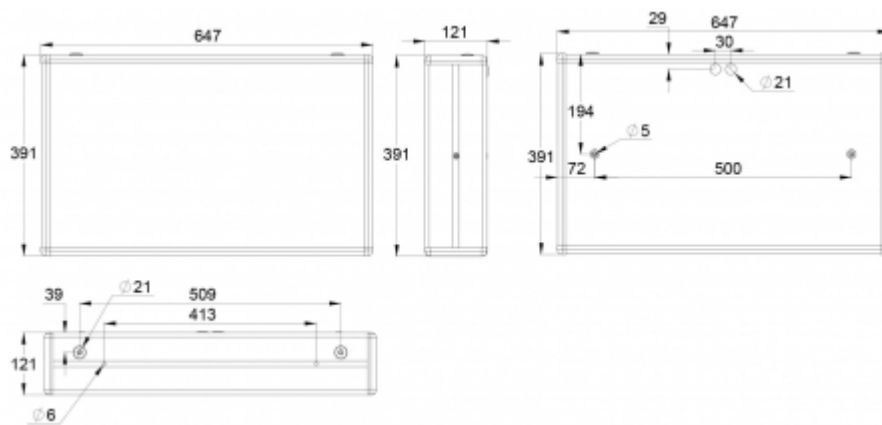


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39723](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39723)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW39722



## 24 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW39722
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004761
ETIM Product Class	EC001957
Length	647 mm
Width	121 mm
Height	391 mm
Weight	4,6 kg
Max Input Power VA	26 VA
Max Input Power W	18 W
Nominal Supply Voltage	24 V, 50/60 Hz AC, DC
Protection Class	II
IP Class	IP44
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	70 m
Light Source	FD-18/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3971E		70	ESC 3 Emergency Exit Lights
PB3972E		70	ESC 3 Emergency Exit Lights
PB3973E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39722](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39722)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



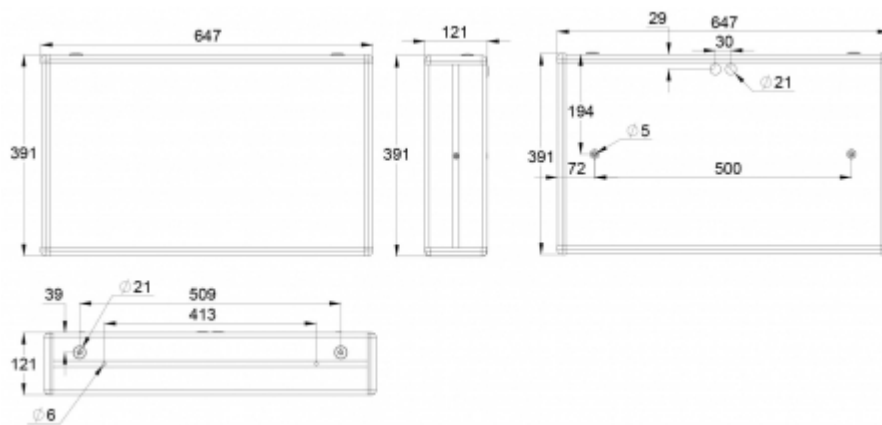


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39722](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39722)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW39782



## 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW39782
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004785
ETIM Product Class	EC001957
Length	647 mm
Width	121 mm
Height	391 mm
Weight	4,6 kg
Max Input Power VA	22 VA
Max Input Power W	18 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP44
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	70 m
Light Source	FD-18/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3971E		70	ESC 3 Emergency Exit Lights
PB3972E		70	ESC 3 Emergency Exit Lights
PB3973E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



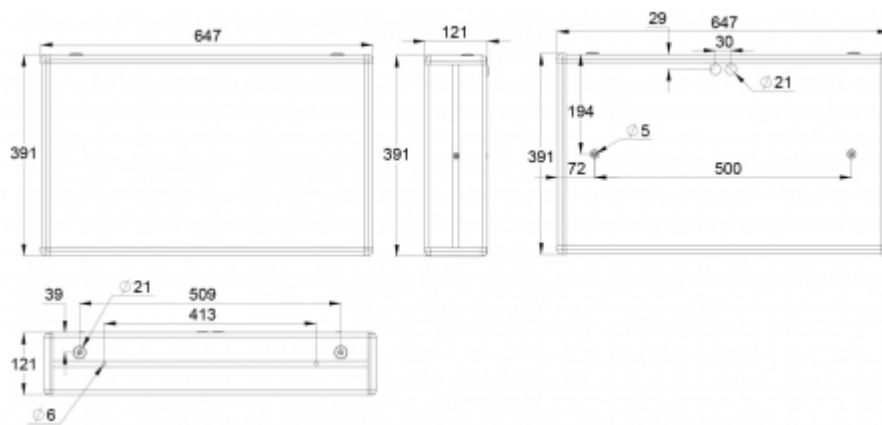


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW39781



## 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.



Product Code	TW39781
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004778
ETIM Product Class	EC001957
Length	647 mm
Width	121 mm
Height	391 mm
Weight	4,6 kg
Max Input Power VA	22 VA
Max Input Power W	18 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP44
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	70 m
Light Source	FD-18/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3971E		70	ESC 3 Emergency Exit Lights
PB3972E		70	ESC 3 Emergency Exit Lights
PB3973E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



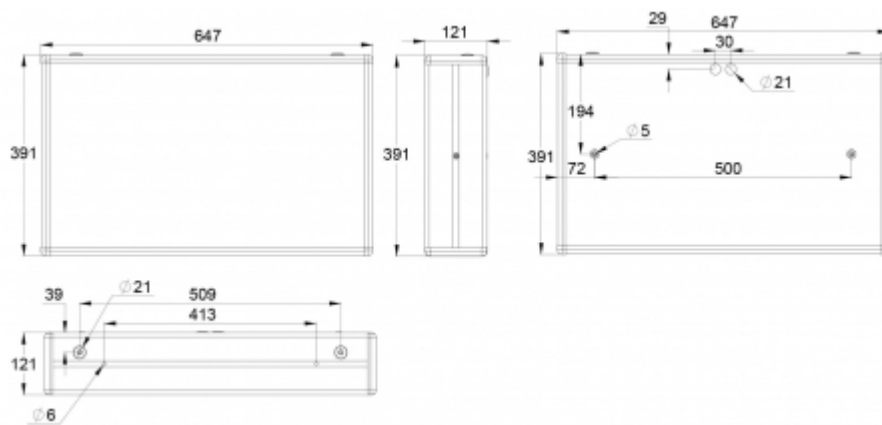


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW39782K



## Addressable 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW39782K
Feature	Tapsa Control
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004716
ETIM Product Class	EC001957
Length	647 mm
Width	121 mm
Height	391 mm
Weight	4,6 kg
Max Input Power VA	22 VA
Max Input Power W	18 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP44
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	70 m
Light Source	FD-18/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3971E		70	ESC 3 Emergency Exit Lights
PB3972E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782k)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3973E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



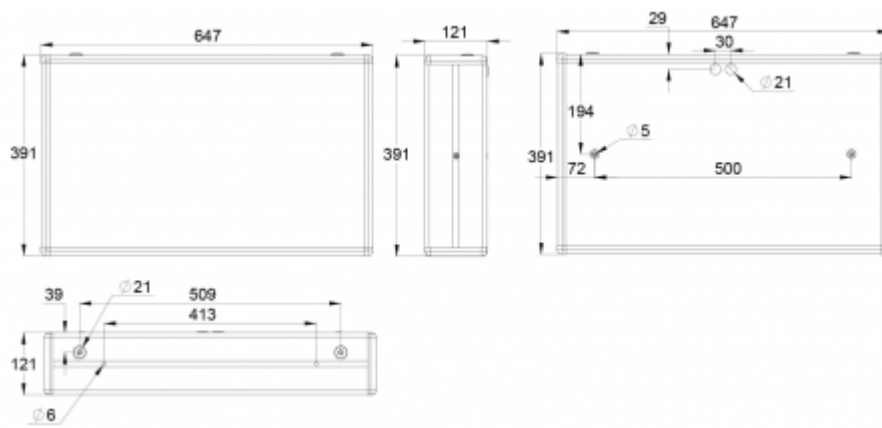

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39782k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# ESC 3 EMERGENCY EXIT LIGHT TW39781K



## Addressable 230 V centrally supplied Emergency Exit Light

The stylish aluminium profile bodied ESC 3 is particularly suitable for large areas, which require a long viewing distance. The luminaire is suitable for wall, as well as for ceiling suspended installation. Wall mounting comes as standard.

Certain models can be used as 1 sided as well as 2 sided. ESC 3 uses fluorescent tubes as a its light source.

TW397xx luminaire's IP class is 44, and TW494xx luminaire's IP class is 20.

Product Code	TW39781K
Feature	Tapsa Control
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045004709
ETIM Product Class	EC001957
Length	647 mm
Width	121 mm
Height	391 mm
Weight	4,6 kg
Max Input Power VA	22 VA
Max Input Power W	18 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP44
Temperature Range Min - Max	-10...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	70 m
Light Source	FD-18/40/1B-E-G13
Body Material	aluminium profile
Electrical Installation	3 x 2,5 mm <sup>2</sup>

ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3971E		70	ESC 3 Emergency Exit Lights
PB3972E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: February 27, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)





Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PB3973E		70	ESC 3 Emergency Exit Lights

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



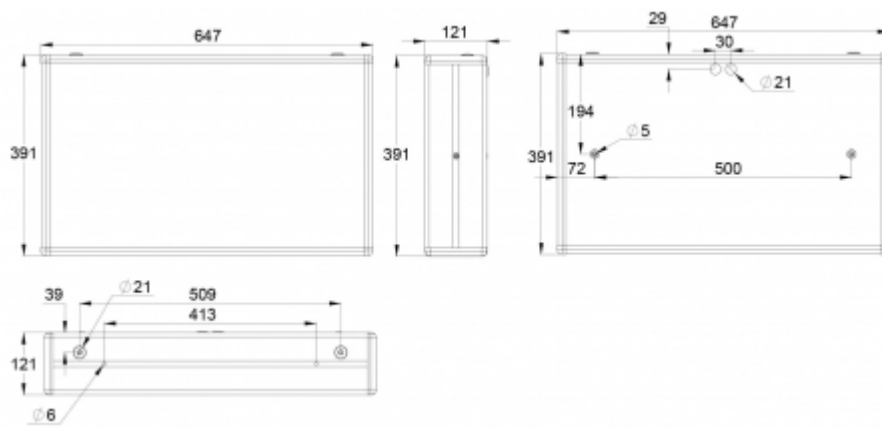

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: February 27, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781k](http://www.teknoware.com/en/emergency-lighting/esc-3-emergency-exit-light-tw39781k)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

