



# SLIMSPOT II: ZONE LOWBAY

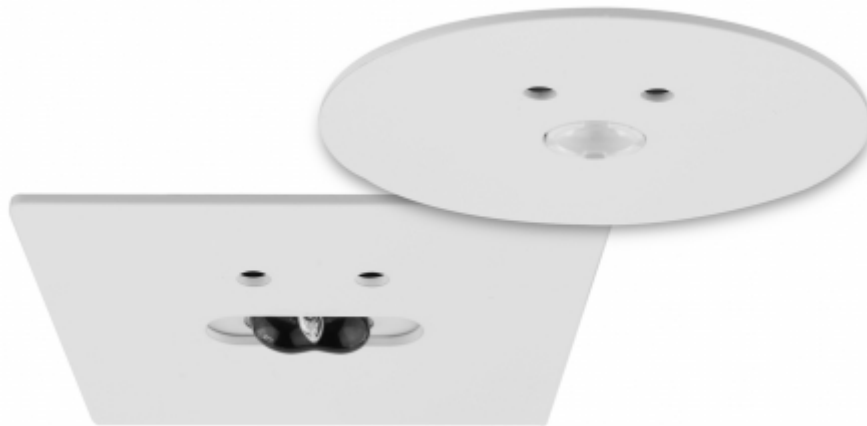

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

for open areas

installation height: up to 4 meters

self-contained or centrally supplied depending on model

IP rating: IP20

installation: recess-mounted

material: metal framing

standard colour: white (RAL 9003)

optional colours: black (RAL 9005) and grey (RAL 9006)

The product codes starting with letter Y include an individually packed luminaire. The product codes starting with TW include the luminaire only.

## SELF-CONTAINED ESCAP EMERGENCY LIGHTS WITH SUPER CAPACITOR AND SELF-TESTING

Product Code	Nominal Supply Voltage	Feature	Backup (h)	Form
TWS6392WM	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	●

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/emergency-lights/emergency-light-product-families/slimspot-ii-zone-lowbay](http://www.teknoware.com/en/emergency-lighting/emergency-lights/emergency-light-product-families/slimspot-ii-zone-lowbay)



Product Code	Nominal Supply Voltage	Feature	Backup (h)	Form
TWS6392WM4	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	●
TWS6392WM5	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	●
TWS6392WMC	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	●
TWSA292WM4	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	■
TWSA292WM5	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	■
TWSA292WM	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	■
TWSA292WMC	220-240 V, 50/60 Hz AC	Escap, Lumi Test	1	■

## SELF-CONTAINED ESCAP EMERGENCY LIGHTS WITH SUPER CAPACITOR AND WIRELESS CENTRAL MONITORING

Product Code	Nominal Supply Voltage	Feature	Backup (h)
TWS6392WA	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWS6392WA4	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWS6392WA5	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWS6392WAC	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWSA292WA4	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWSA292WA5	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWSA292WA	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1
TWSA292WAC	220-240 V, 50/60 Hz AC	Aalto Control, Escap, Lumi Test	1

## SELF-CONTAINED EMERGENCY LIGHTS WITH BATTERY AND SELF-TESTING

Product Code	Nominal Supply Voltage	Feature	Backup (h)
TWT6352WM	220-240 V, 50/60 Hz AC	Lumi Test	1
TWT6353WM	220-240 V, 50/60 Hz AC	Lumi Test	3
TWTA252WM	220-240 V, 50/60 Hz AC	Lumi Test	1
TWTA253WM	220-240 V, 50/60 Hz AC	Lumi Test	3

## SELF-CONTAINED EMERGENCY LIGHTS WITH BATTERY AND WIRELESS CENTRAL MONITORING

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/emergency-lights/emergency-light-product-families/slimspot-ii-zone-lowbay](http://www.teknoware.com/en/emergency-lighting/emergency-lights/emergency-light-product-families/slimspot-ii-zone-lowbay)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	Nominal Supply Voltage	Feature	Backup (h)
TWT6352WA	220-240 V, 50/60 Hz AC	Aalto Control, Lumi Test	1
TWT6353WA	220-240 V, 50/60 Hz AC	Aalto Control, Lumi Test	3
TWTA252WA	220-240 V, 50/60 Hz AC	Aalto Control	1
TWTA253WA	220-240 V, 50/60 Hz AC	Aalto Control, Lumi Test	3

## ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY LIGHTS

Product Code	Nominal Supply Voltage	Feature
TWT6351WK	220-240 V, 50/60 Hz AC, DC	Intelligent Controller, Tapsa Control
TWTA251WK	220-240 V, 50/60 Hz AC, DC	Intelligent Controller, Tapsa Control

## NON-ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY LIGHTS

Product Code	Nominal Supply Voltage	Feature
TWT6371W	24-230 V, 50/60 Hz AC, DC	
TWTA271W	24-230 V, 50/60 Hz AC, DC	

## ADDRESSABLE 24 V CENTRALLY SUPPLIED EMERGENCY LIGHTS

Product Code	Nominal Supply Voltage	Feature
TWT6341WK	24 V, 50/60 Hz AC, DC	Tapsa Control
TWTA241WK	24 V, 50/60 Hz AC, DC	Tapsa Control

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/emergency-lights/emergency-light-product-families/slimspot-ii-zone-lowbay](http://www.teknoware.com/en/emergency-lighting/emergency-lights/emergency-light-product-families/slimspot-ii-zone-lowbay)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WA

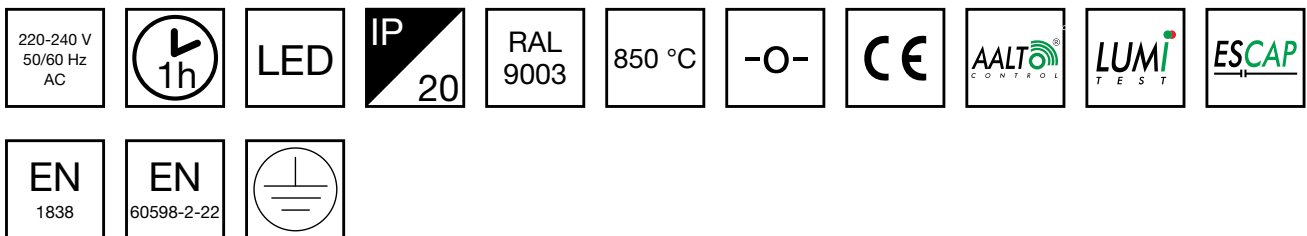

## Self-contained Escap emergency light with 1 h super capacitor and wireless central monitoring

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WA
Feature	Aalto Control, Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025681
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	65 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

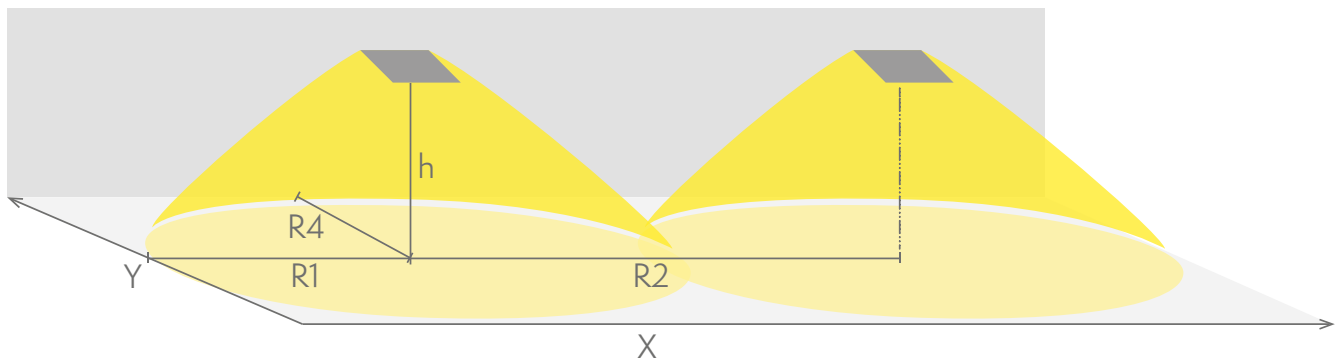

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WA**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1,5	3	7	3
3	1	4	8	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

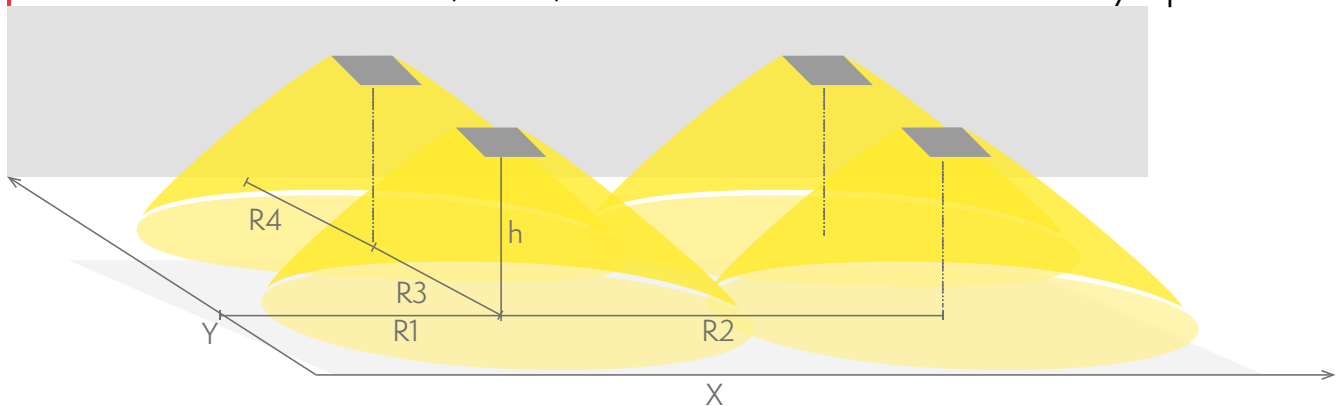

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WA**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1,5	3	5	5	3

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1	4	6,5	6,5	4

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

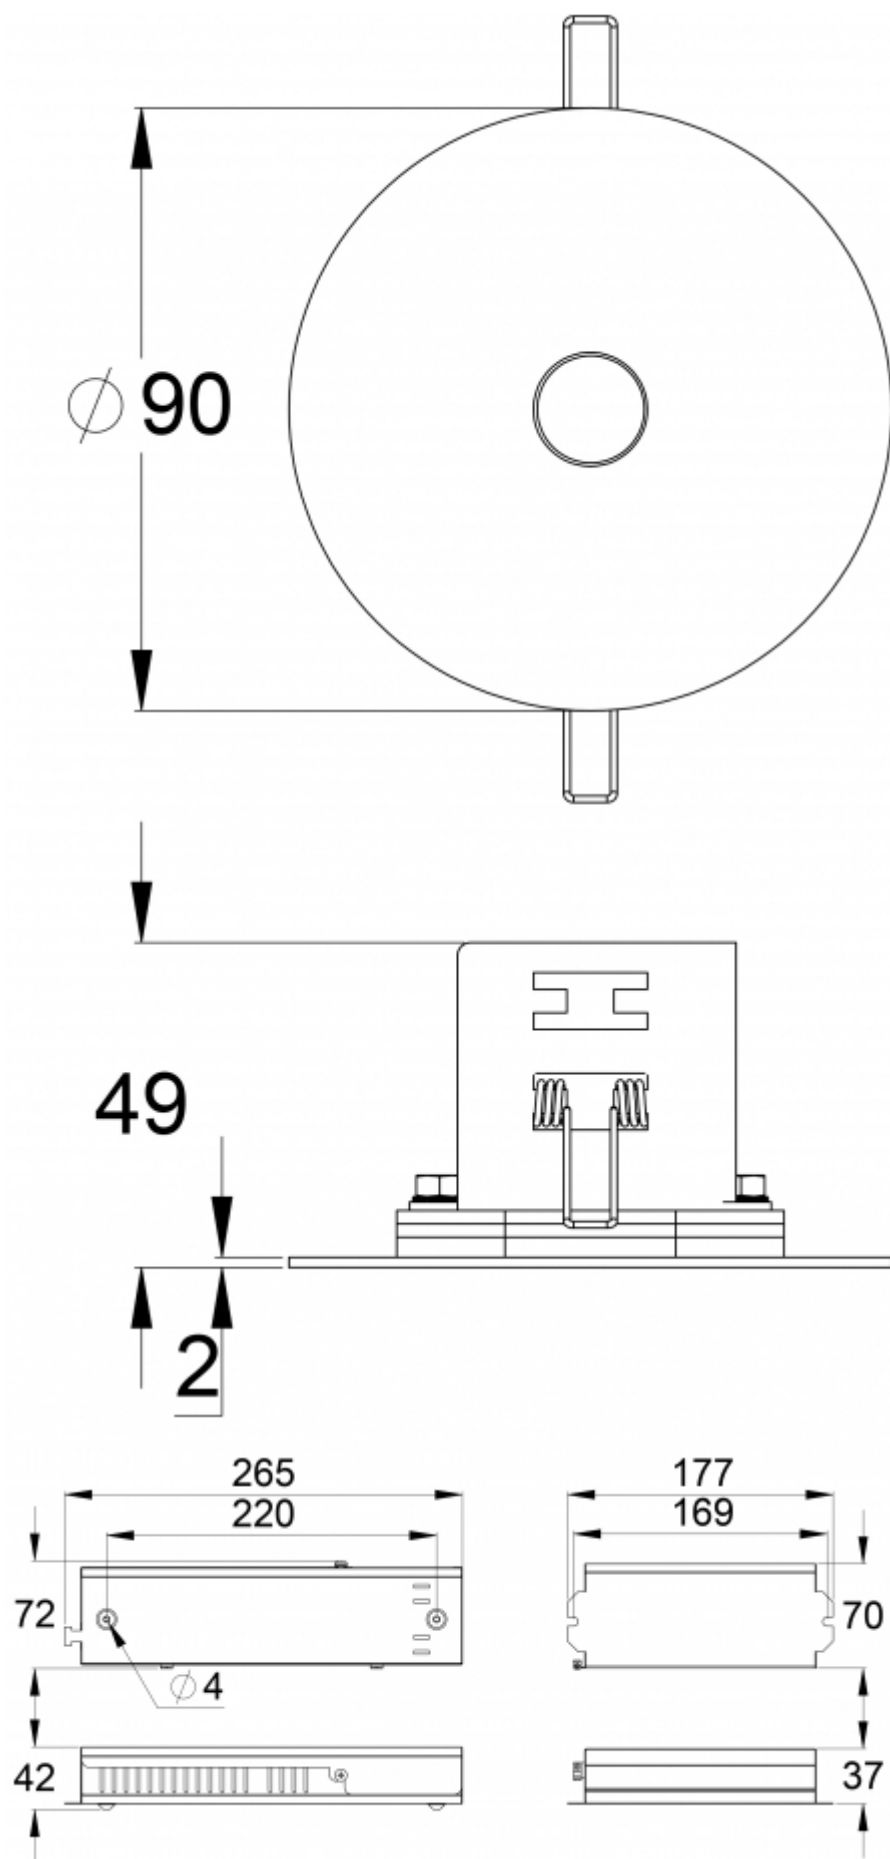

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa)




Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WA4

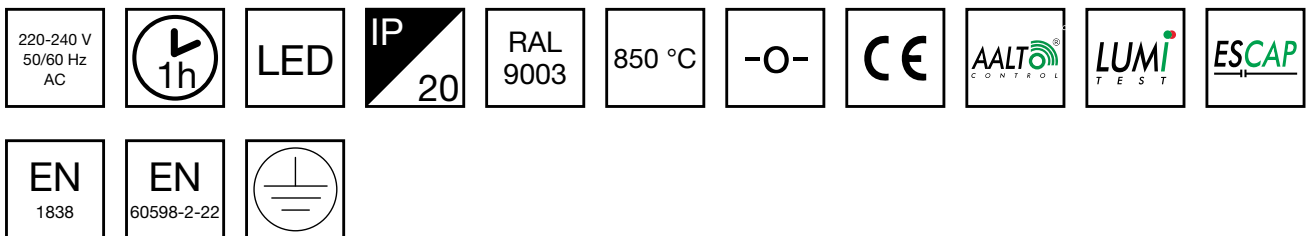

## Self-contained Escap emergency light with 1 h super capacitor and wireless central monitoring

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WA4
Feature	Aalto Control, Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045026084
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	65 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WA4**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1,5	3	7	3
3	1	4	8	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

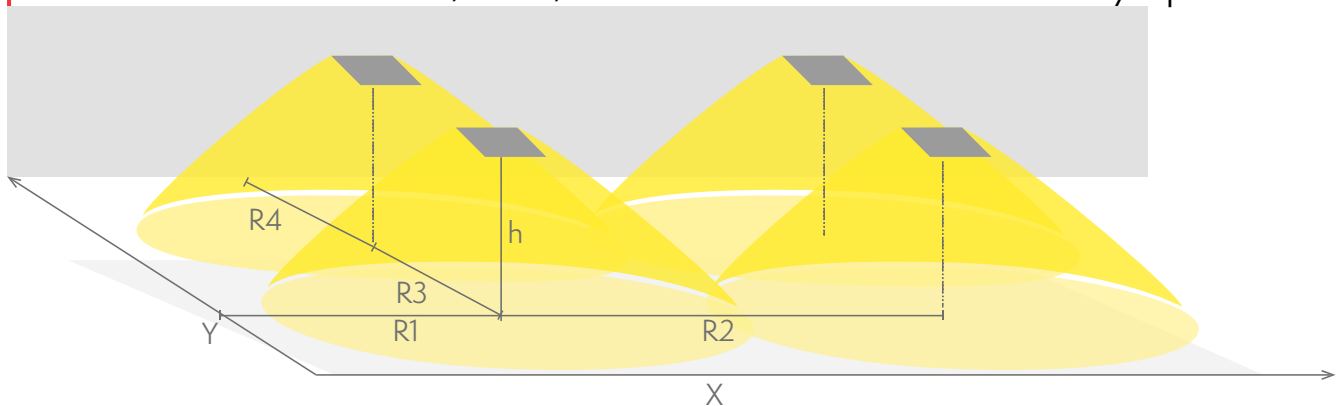

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WA4**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1,5	3	5	5	3

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1	4	6,5	6,5	4

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

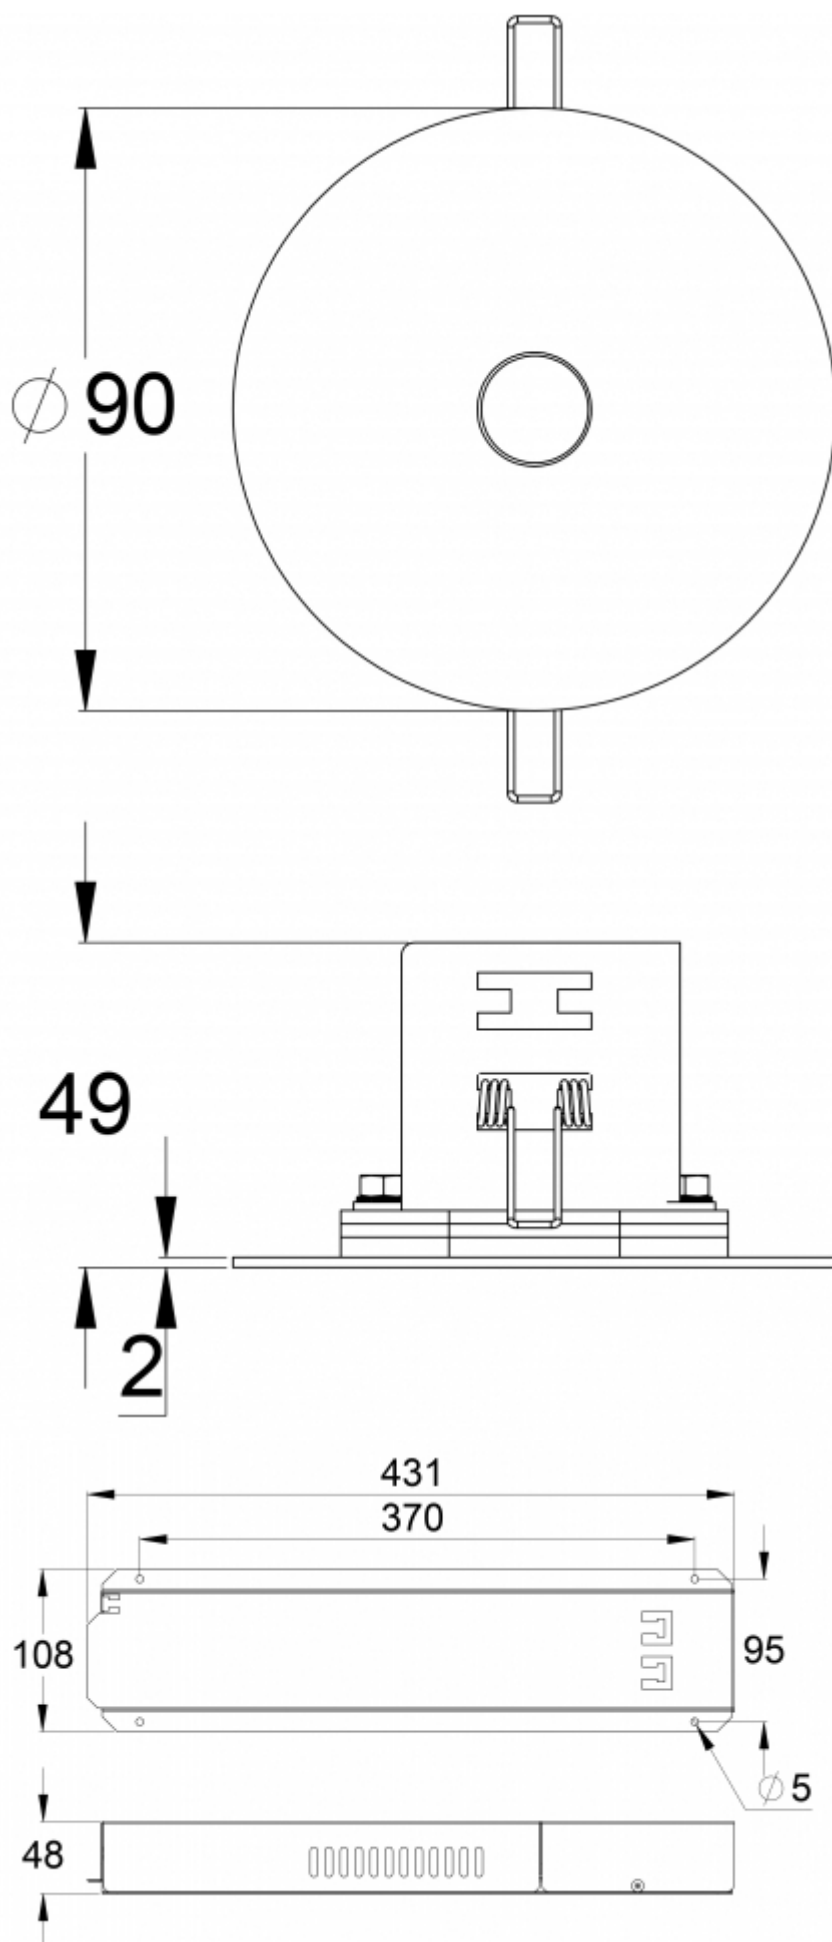

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WA5

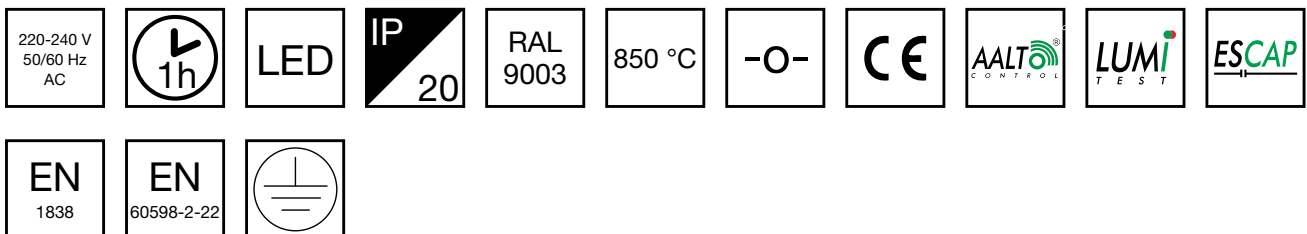

## Self-contained Escap emergency light with 1 h super capacitor and wireless central monitoring

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WA5
Feature	Aalto Control, Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045026091
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	80 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.


We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa5)



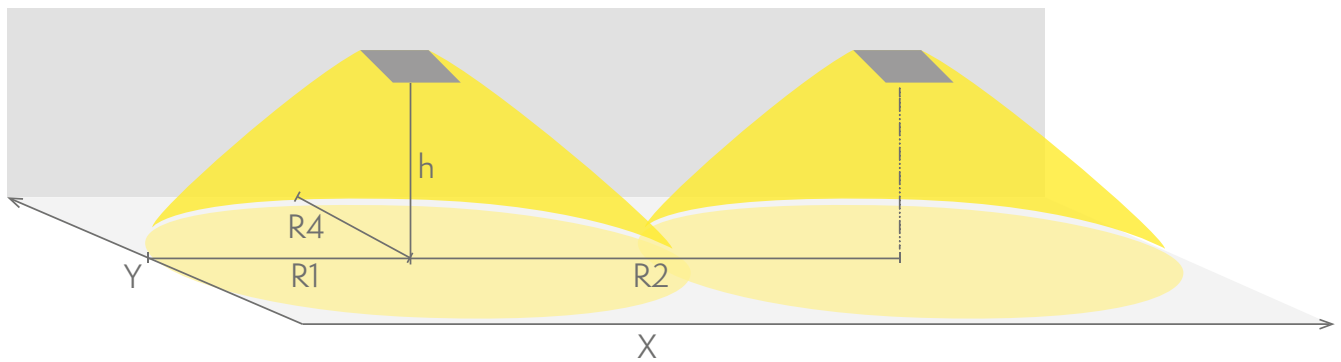

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WA5**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1.7	3	8	3
3	1.2	2.5	8	2.5

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

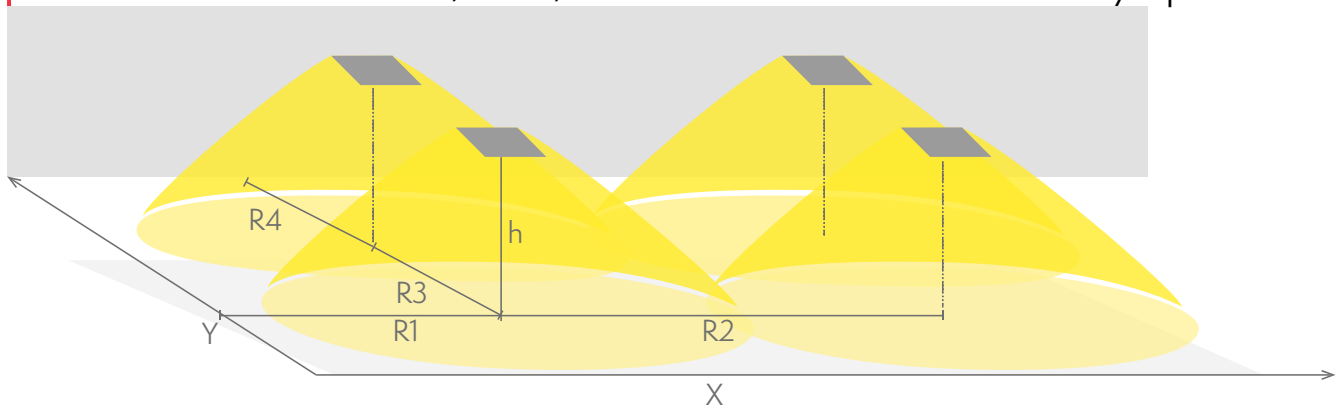

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WA5**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1.7	4	7.5	7.5	4

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wa5)




Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1.2	4	8	8	4
4	0.7	3	8.5	8.5	3

---

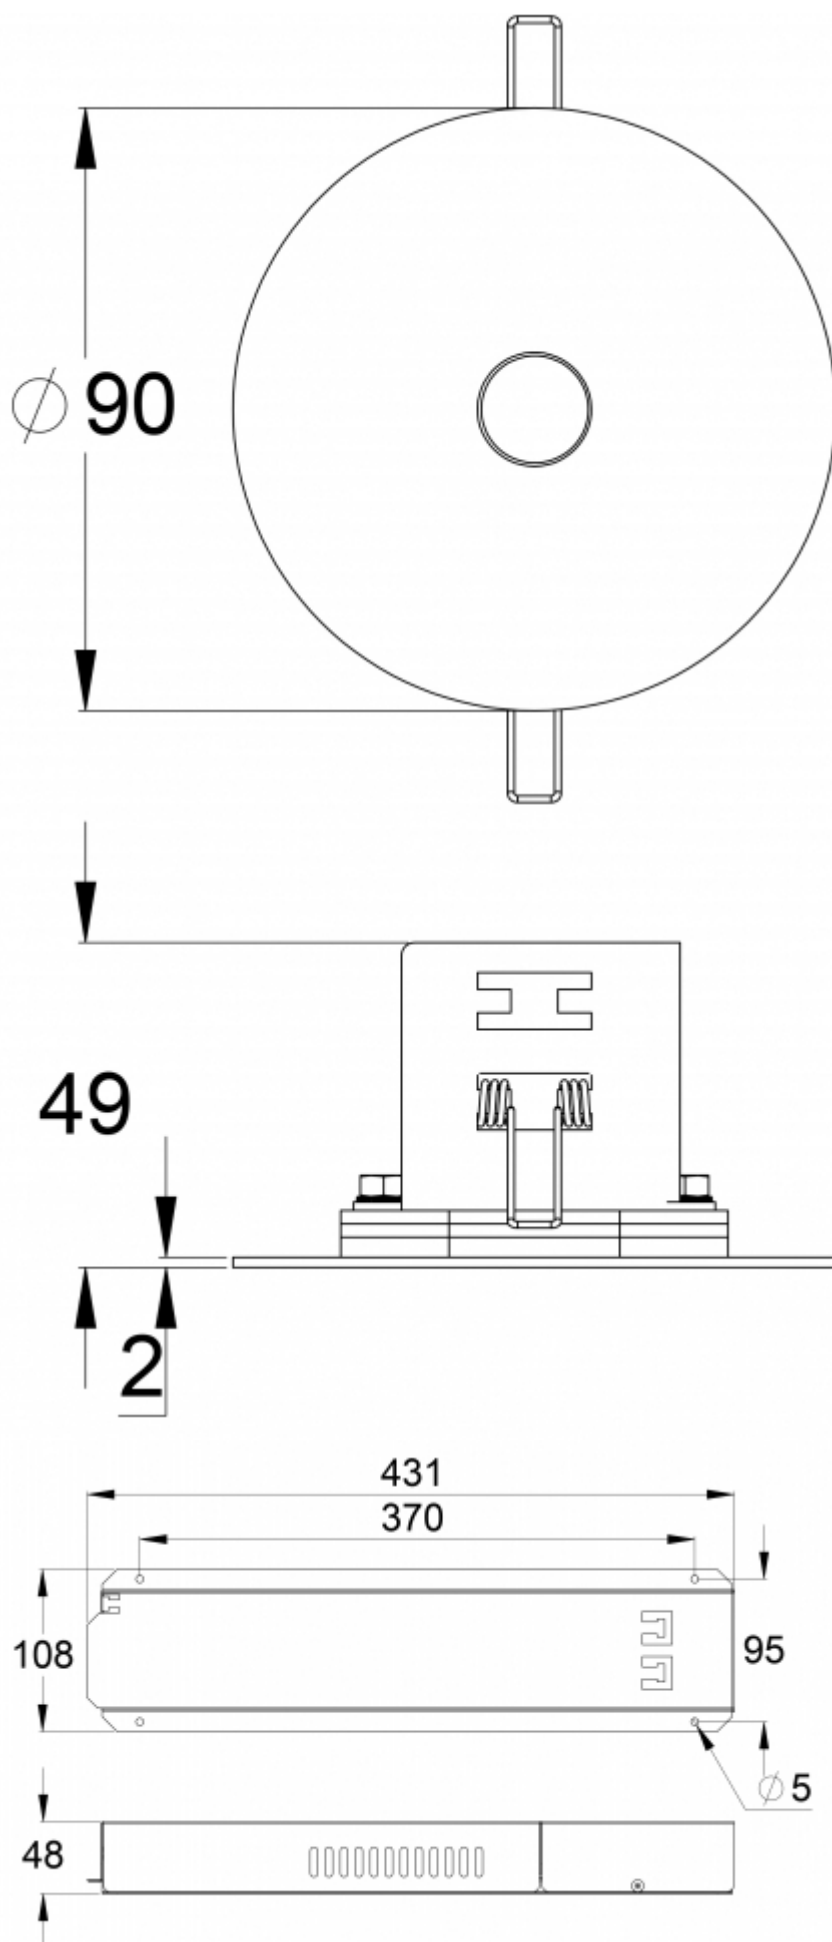

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wa5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WAC

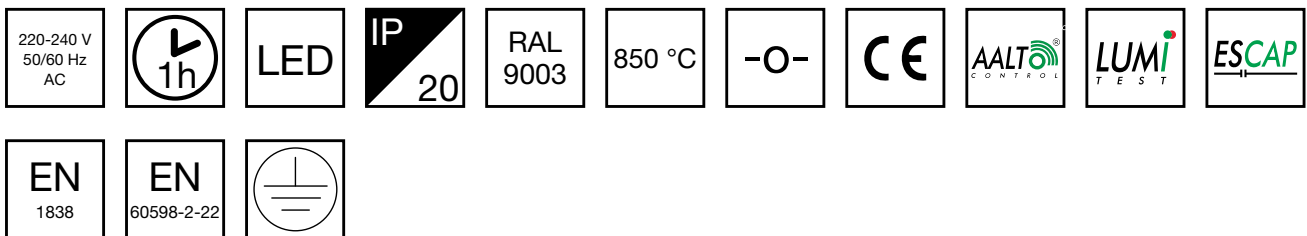

## Self-contained Escap emergency light with 1 h super capacitor and wireless central monitoring

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wac](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wac)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WAC
Feature	Aalto Control, Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025704
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	80 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.


We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wac](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wac)



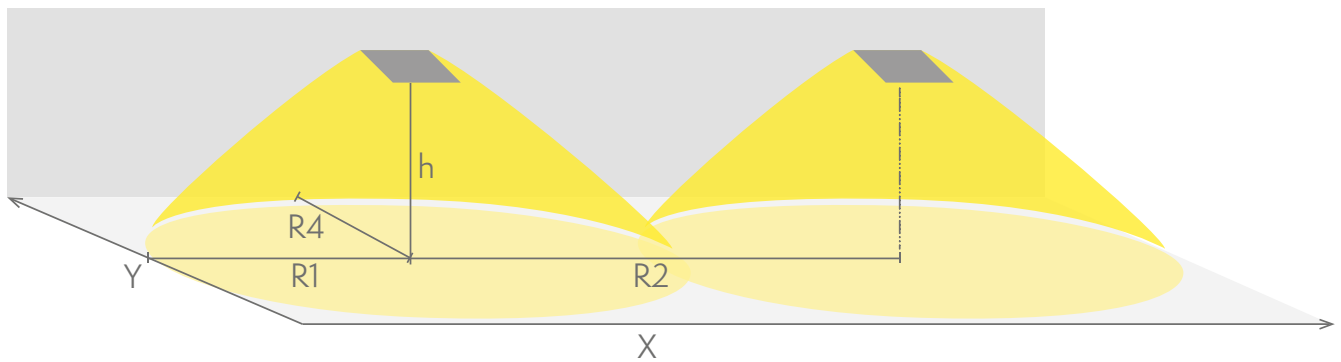

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WAC**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1.7	3	8	3
3	1.2	2.5	8	2.5

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

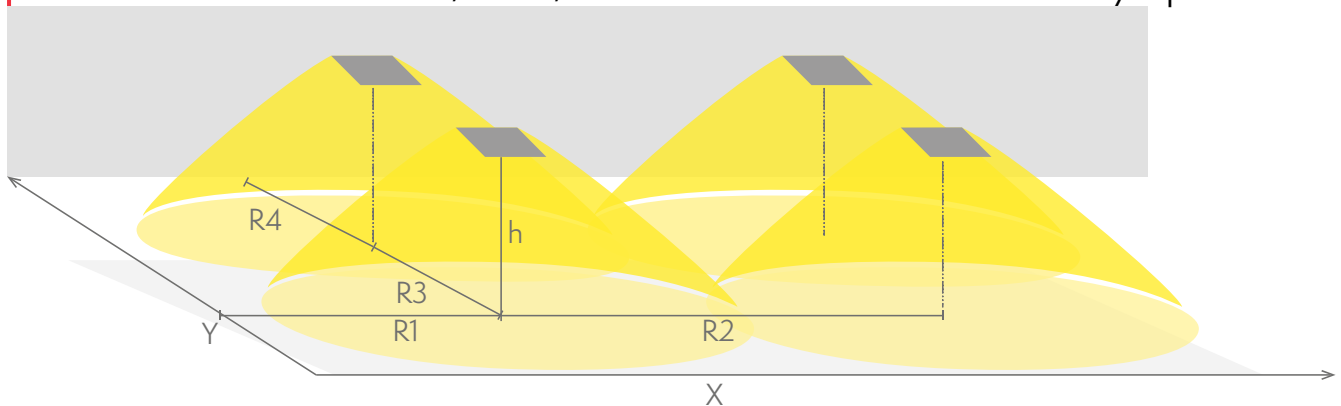

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WAC**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1.7	4	7.5	7.5	4

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wac](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wac)




Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1.2	4	8	8	4
4	0.7	3	8.5	8.5	3

---

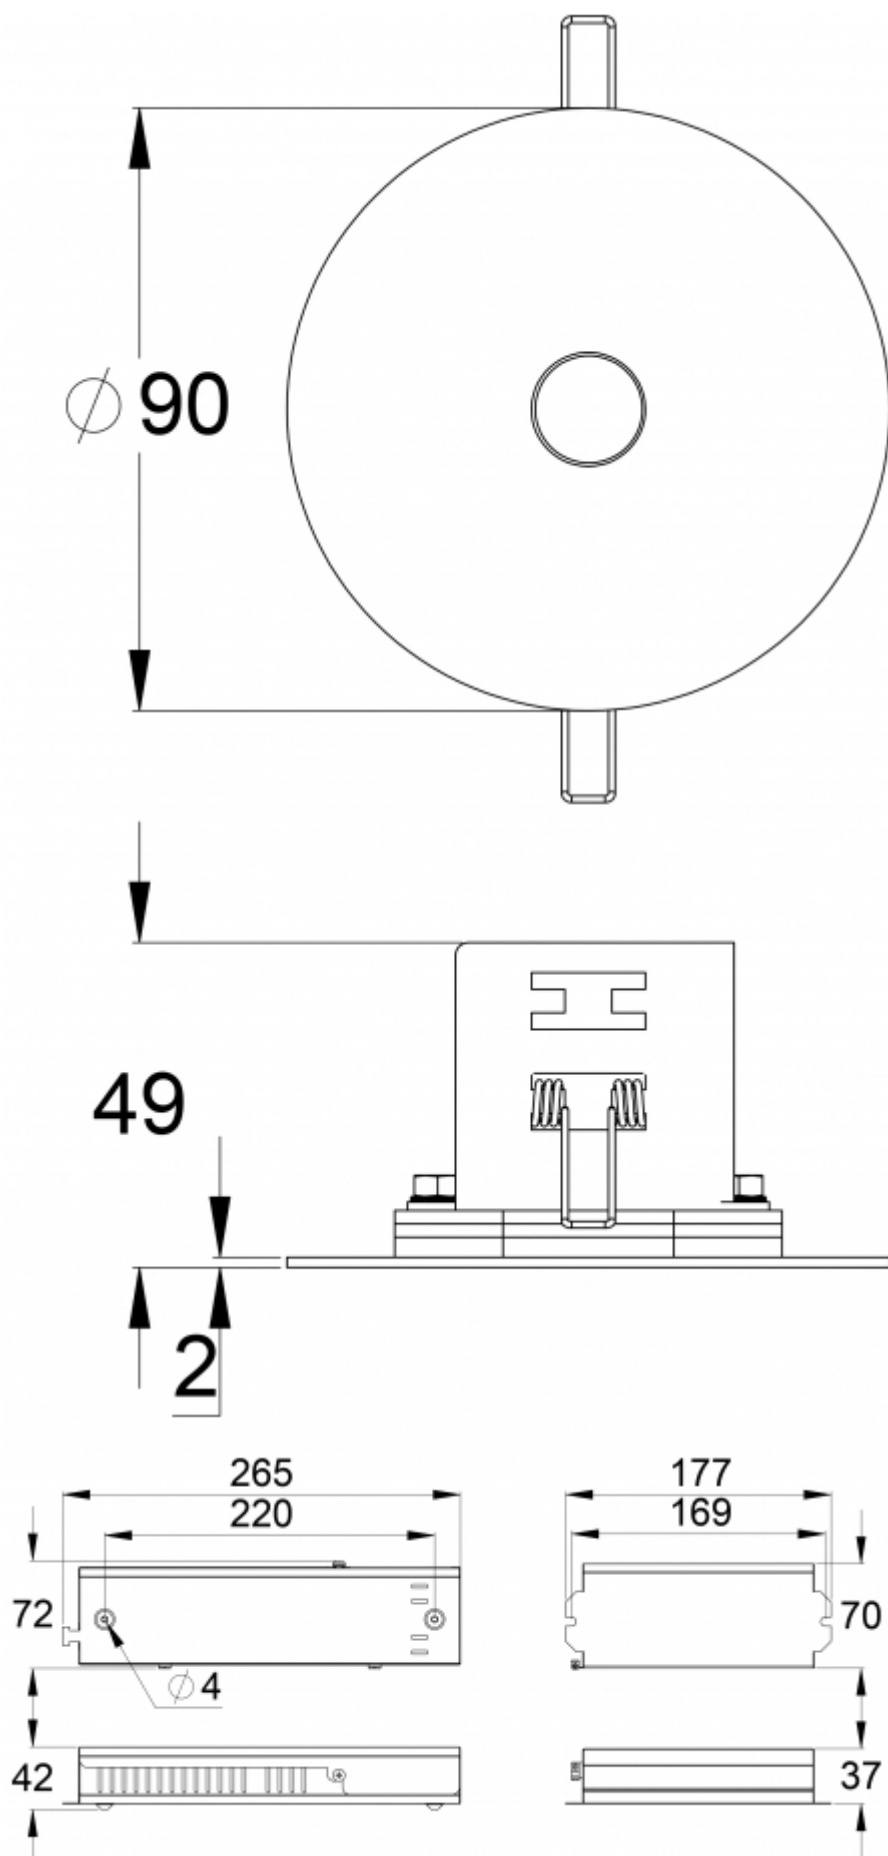

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wac](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wac)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WM

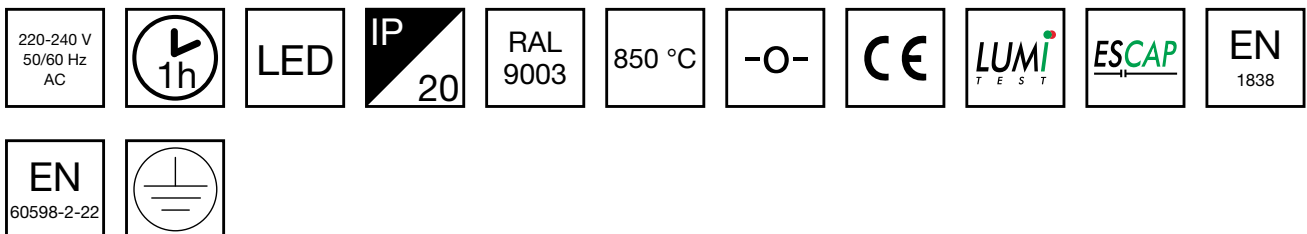

## Self-contained Escap emergency light with 1 h super capacitor and Lumi Test self-testing

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



Product Code	TWS6392WM
Feature	Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025674
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	65 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

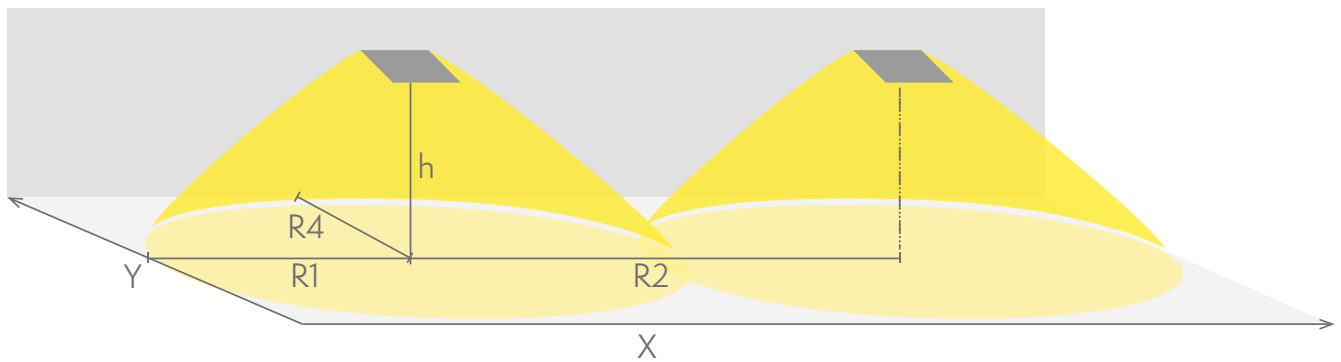

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWS6392WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1,5	3	7	3
3	1	4	8	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

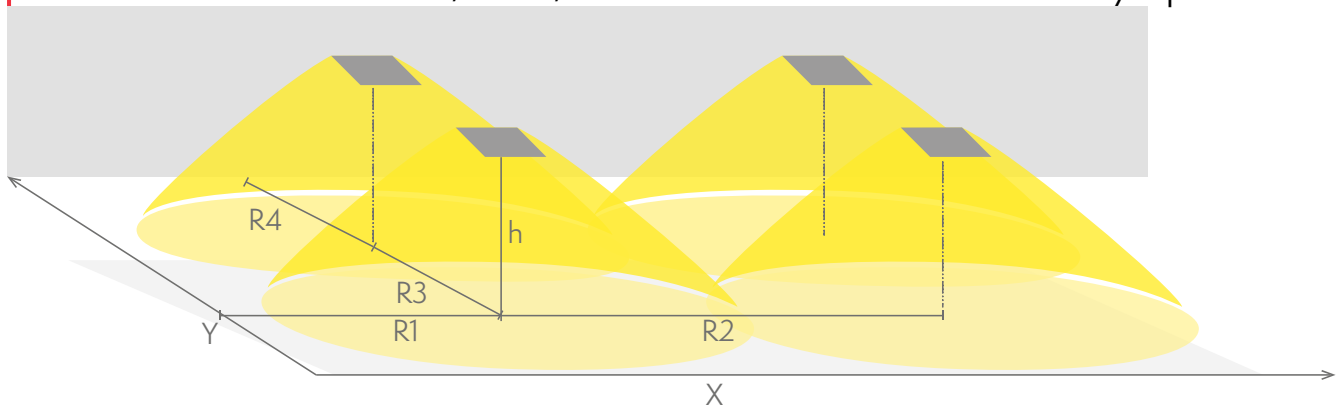

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWS6392WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1,5	3	5	5	3

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1	4	6,5	6,5	4

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

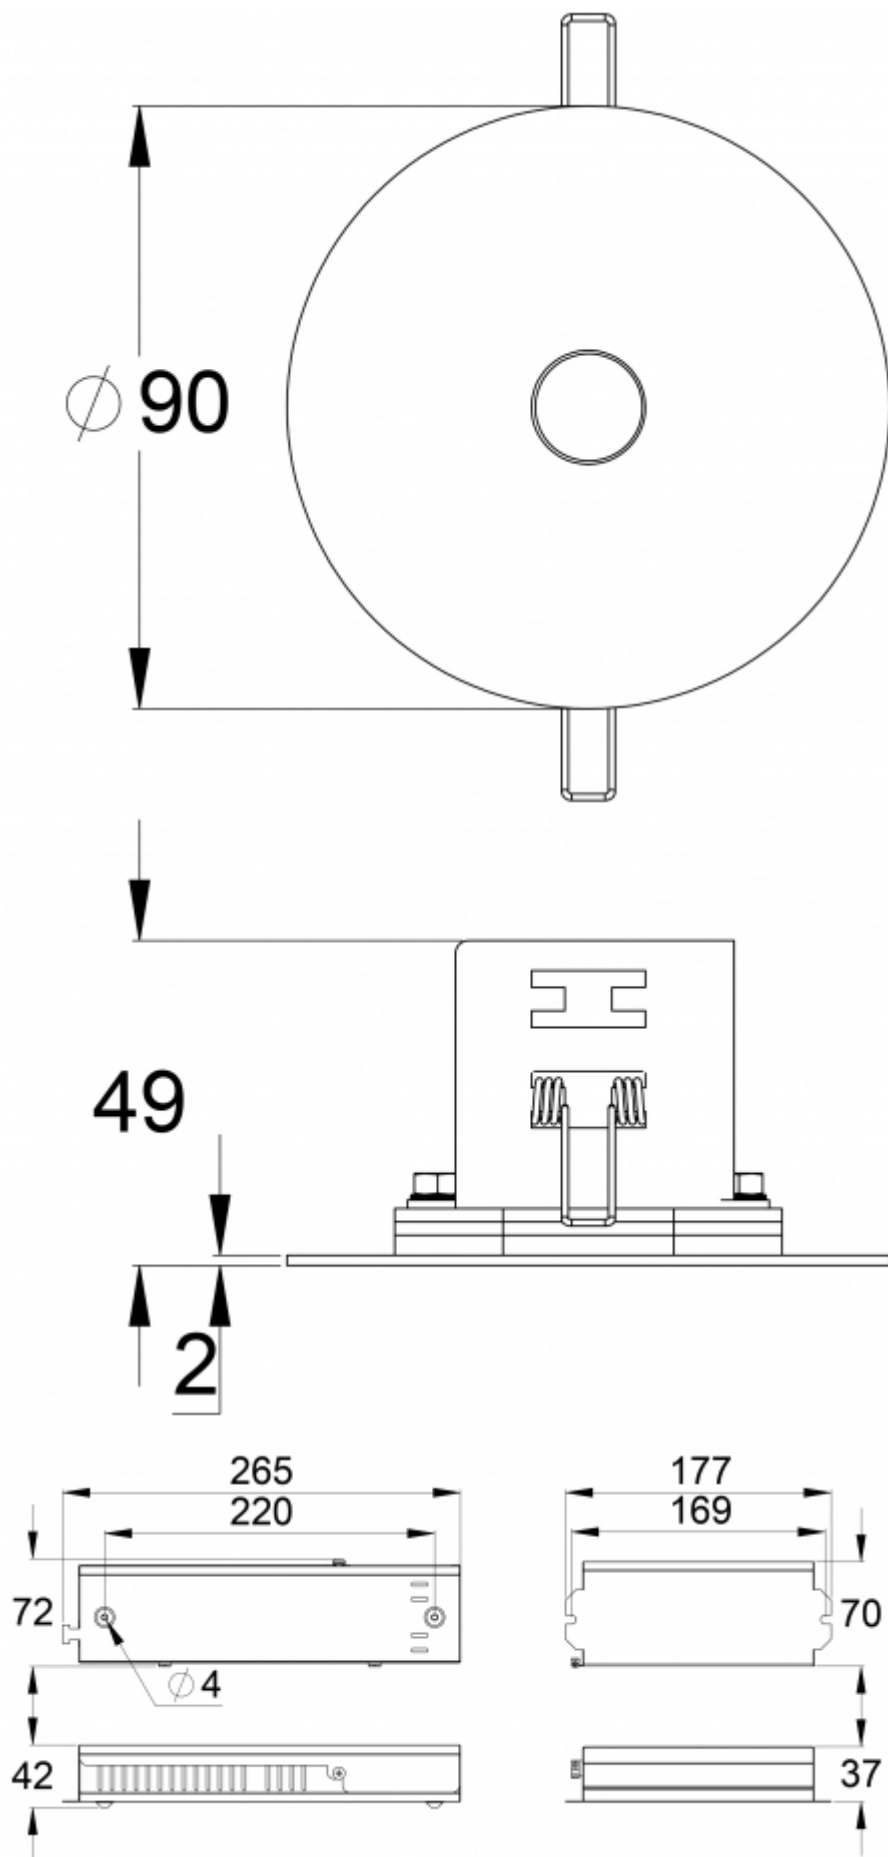

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WM4

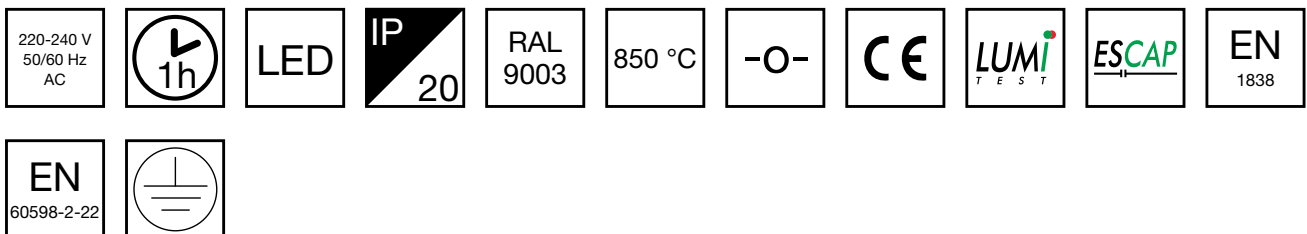

## Self-contained Escap emergency light with 1 h super capacitor and Lumi Test self-testing

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WM4
Feature	Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045026107
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	65 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

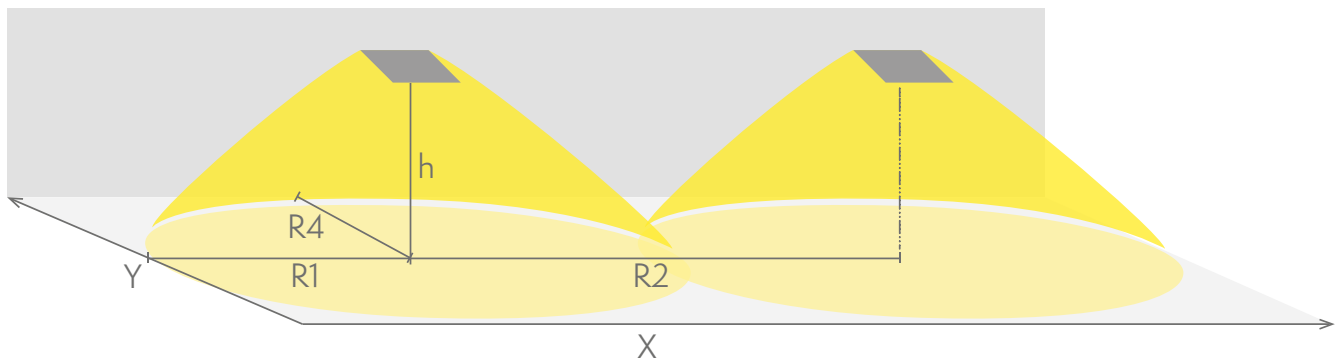

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WM4**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1,5	3	7	3
3	1	4	8	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

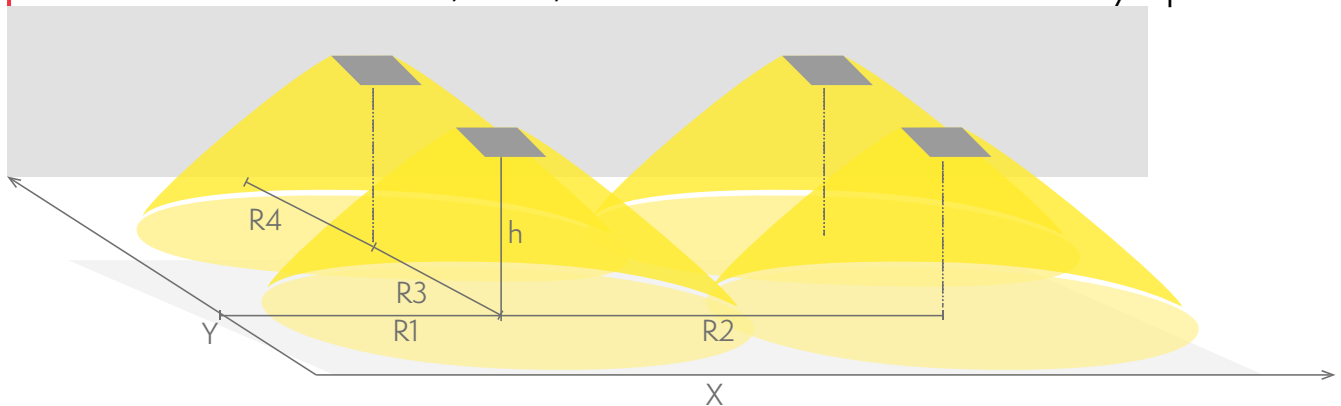

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WM4**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1,5	3	5	5	3

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1	4	6,5	6,5	4

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



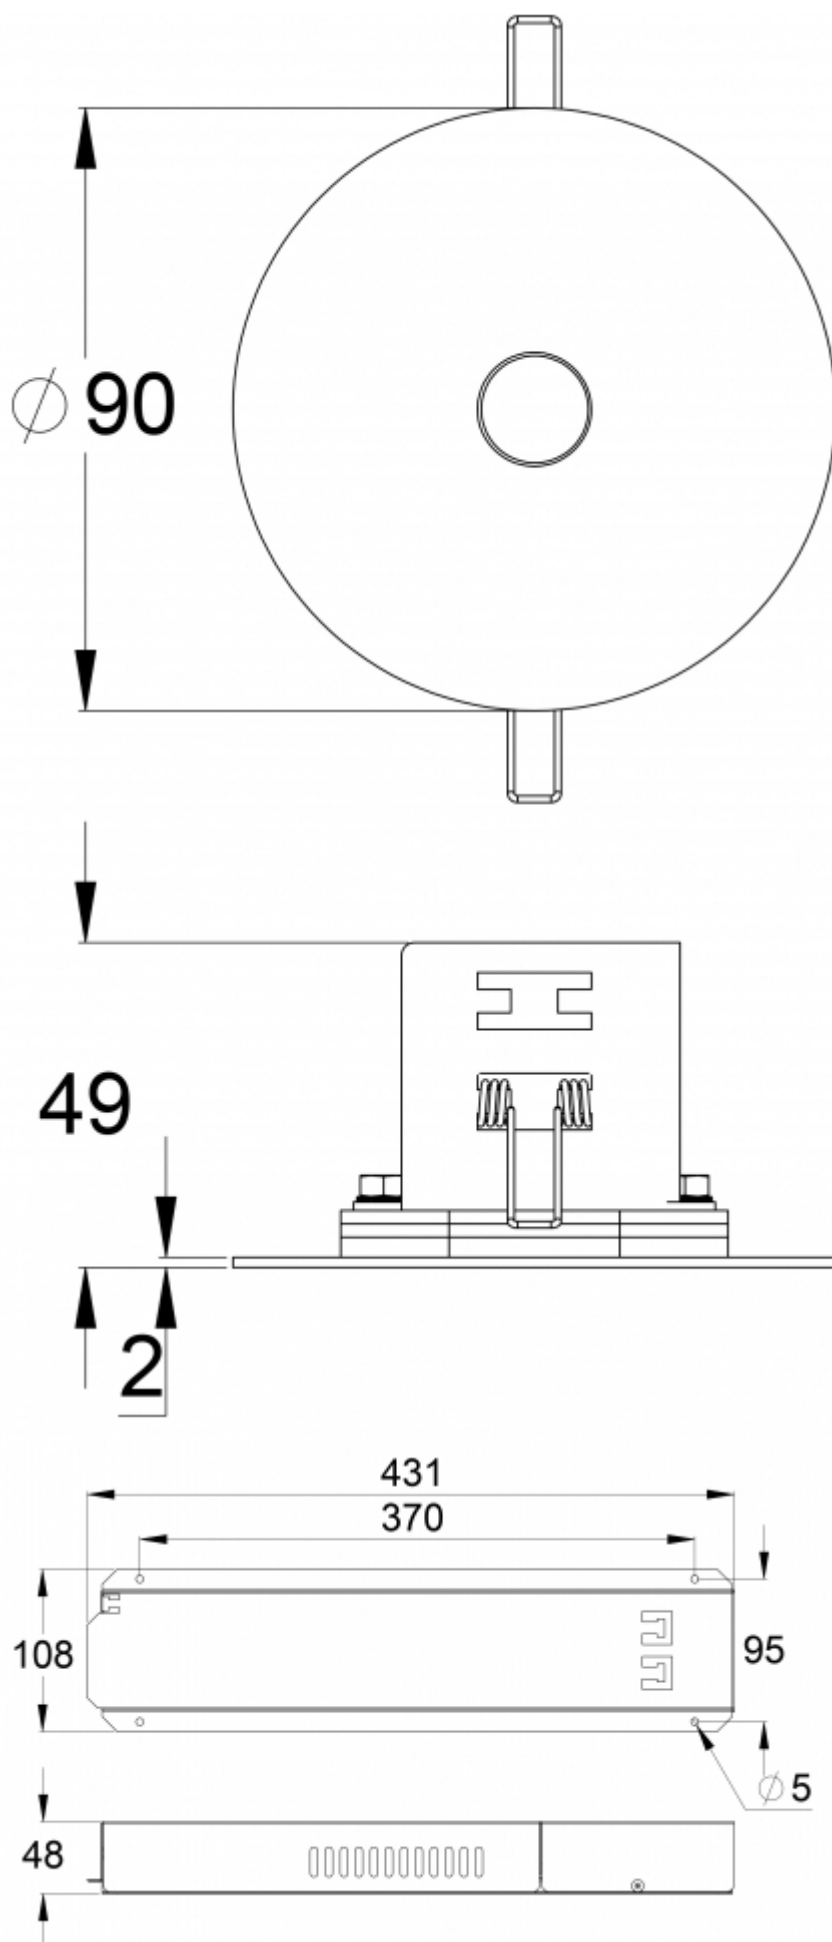

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm4](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm4)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WM5

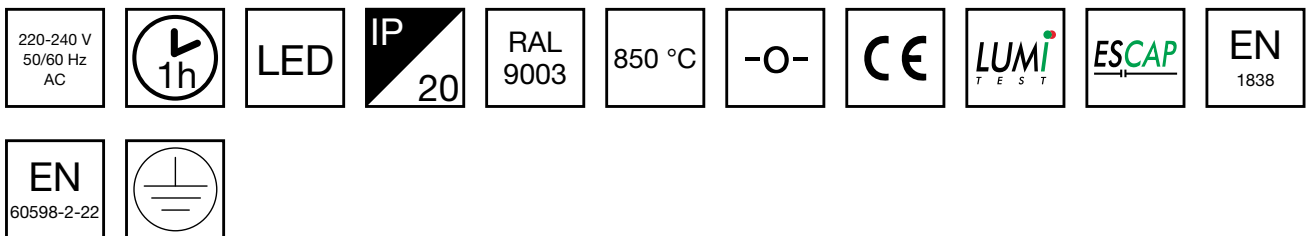

## Self-contained Escap emergency light with 1 h super capacitor and Lumi Test self-testing

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WM5
Feature	Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045026114
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	80 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WM5**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1.7	3	8	3
3	1.2	2.5	8	2.5

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

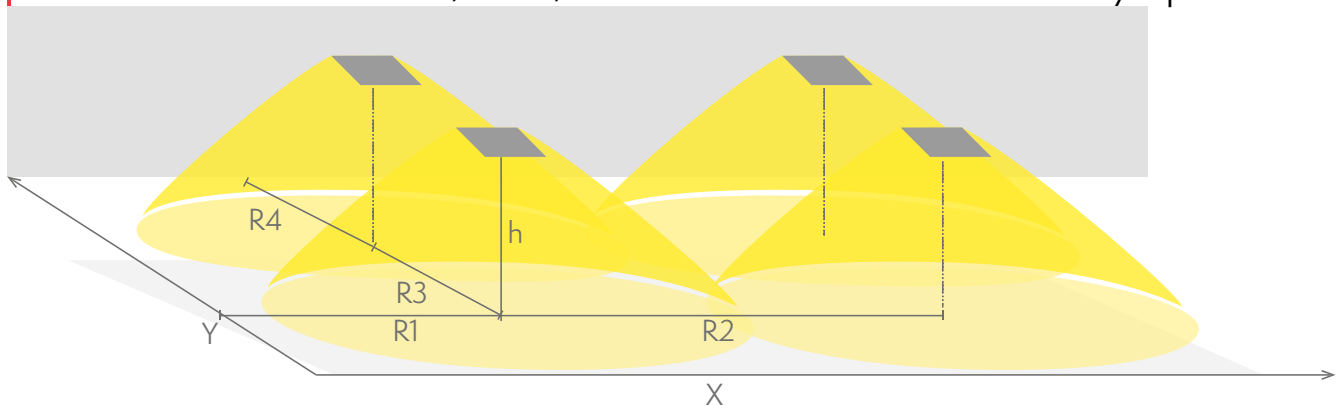

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WM5**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1.7	4	7.5	7.5	4

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1.2	4	8	8	4
4	0.7	3	8.5	8.5	3

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wm5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

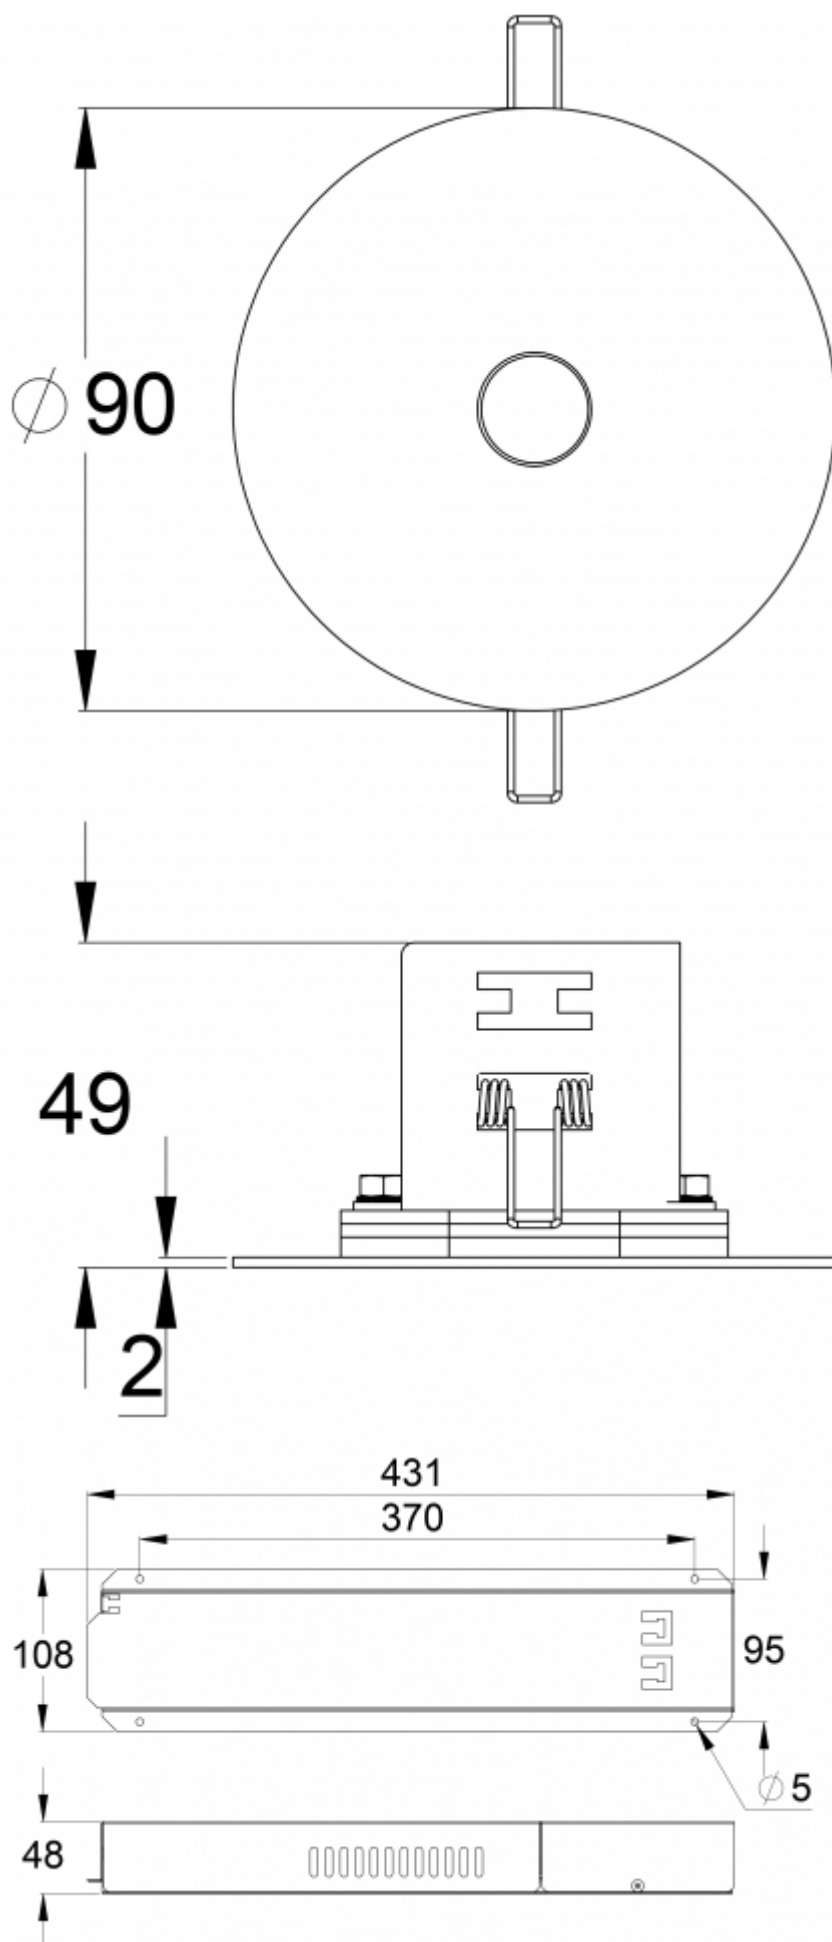

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm5](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wm5)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWS6392WMC

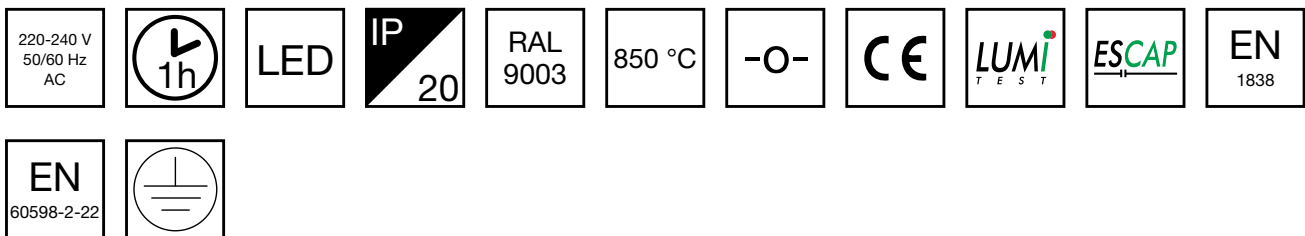

## Self-contained Escap emergency light with 1 h super capacitor and Lumi Test self-testing

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWS6392WMC
Feature	Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025698
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	80 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc)





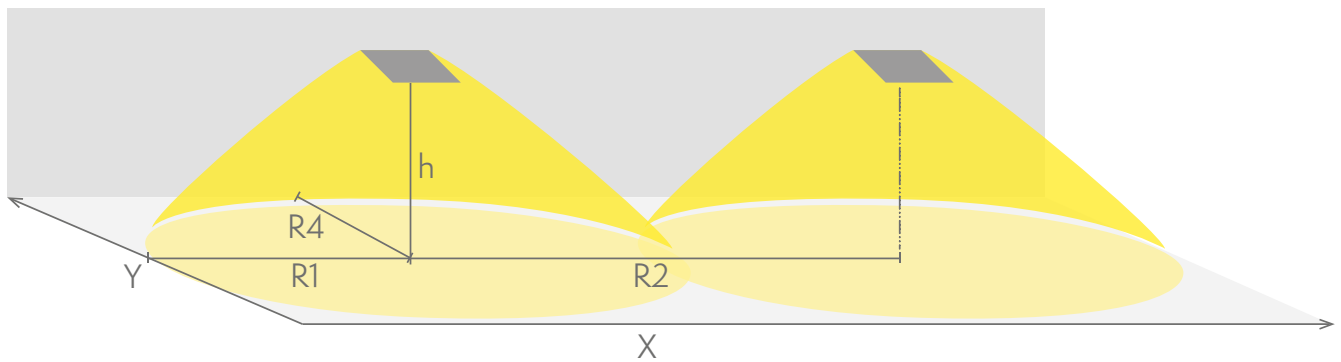

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


**TWS6392WMC**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	1.7	3	8	3
3	1.2	2.5	8	2.5

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

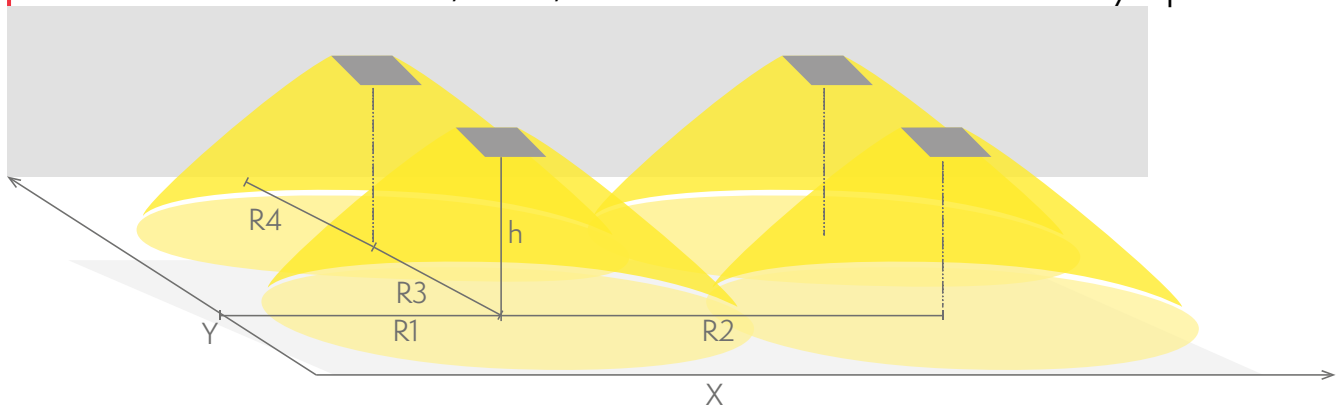

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWS6392WMC**

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	1.7	4	7.5	7.5	4

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
3	1.2	4	8	8	4
4	0.7	3	8.5	8.5	3

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws6392wmc)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

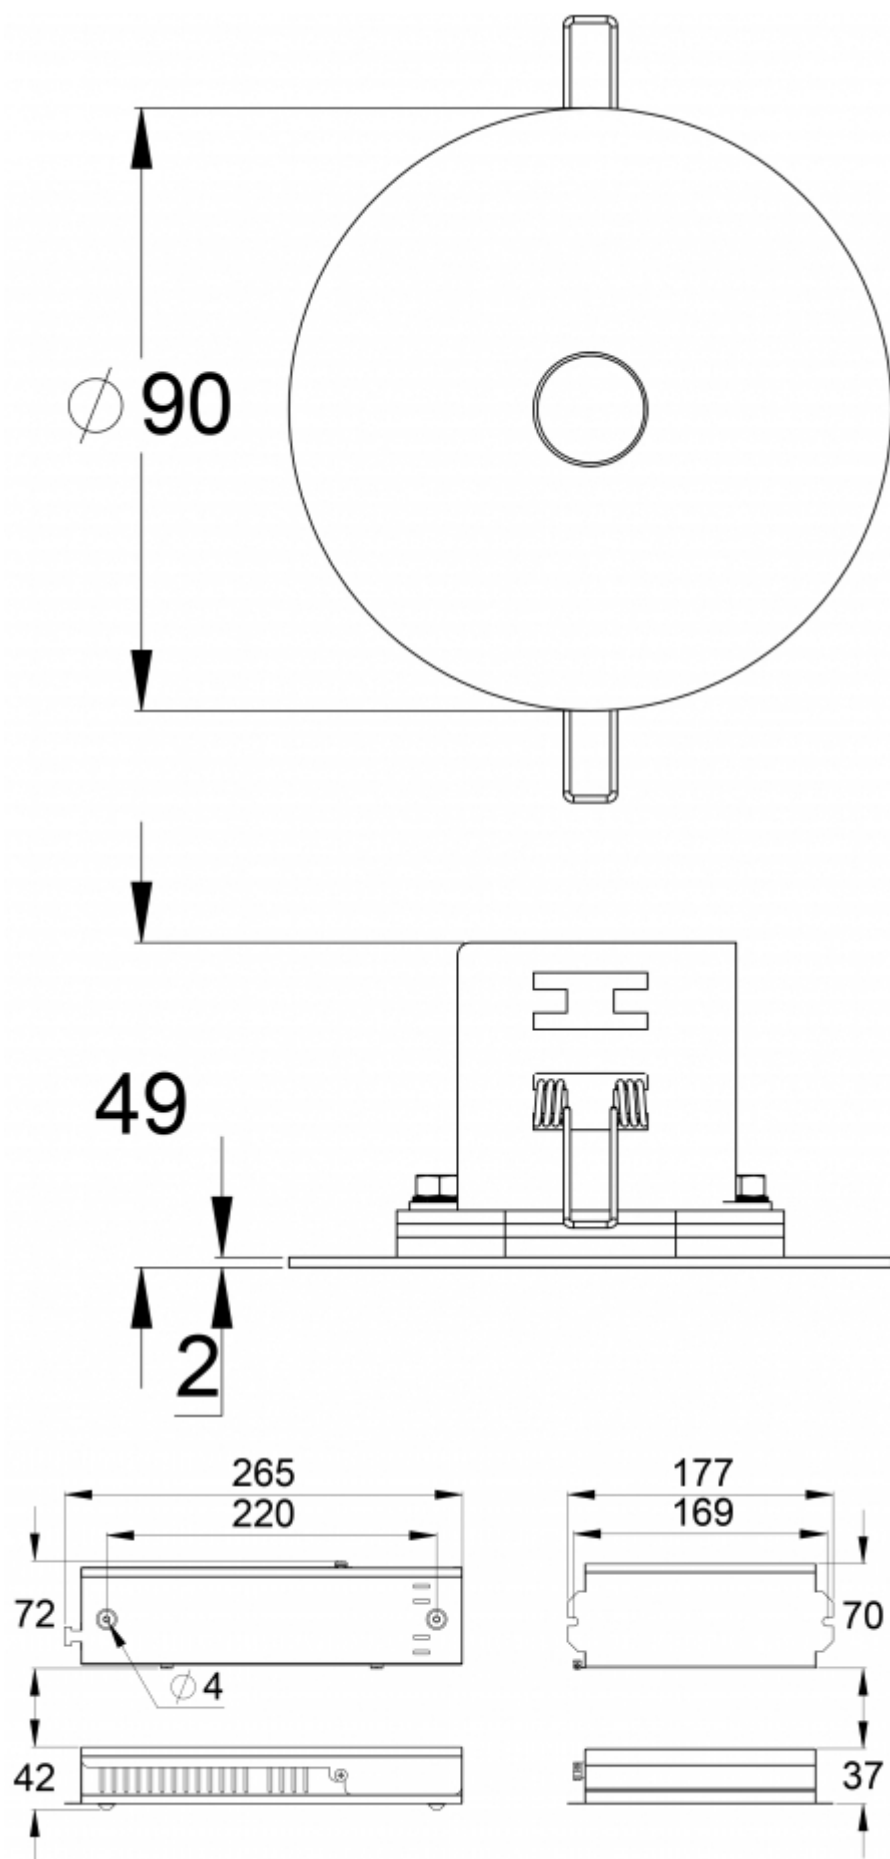

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:


[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wmc](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-tws63-92wmc)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6341WK



## Addressable 24 V centrally supplied emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT6341WK
Feature	Tapsa Control
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025629
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.4 kg
Max Input Power VA	3 VA
Max Input Power W	3,0 W
Nominal Supply Voltage	24 V, 50/60 Hz AC, DC
Protection Class	III
IP Class	IP20
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	2 x 2,5 mm <sup>2</sup>
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

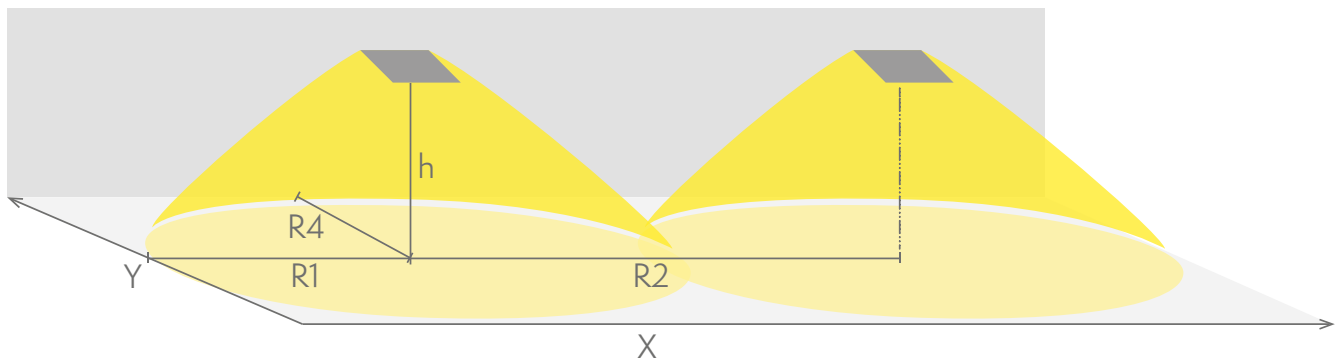

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6341WK

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

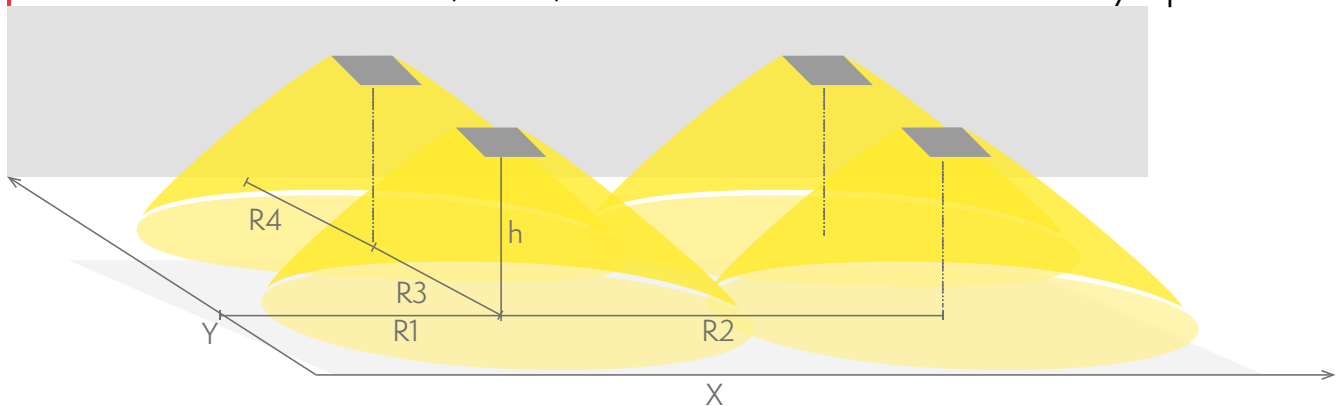

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6341WK

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6341wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

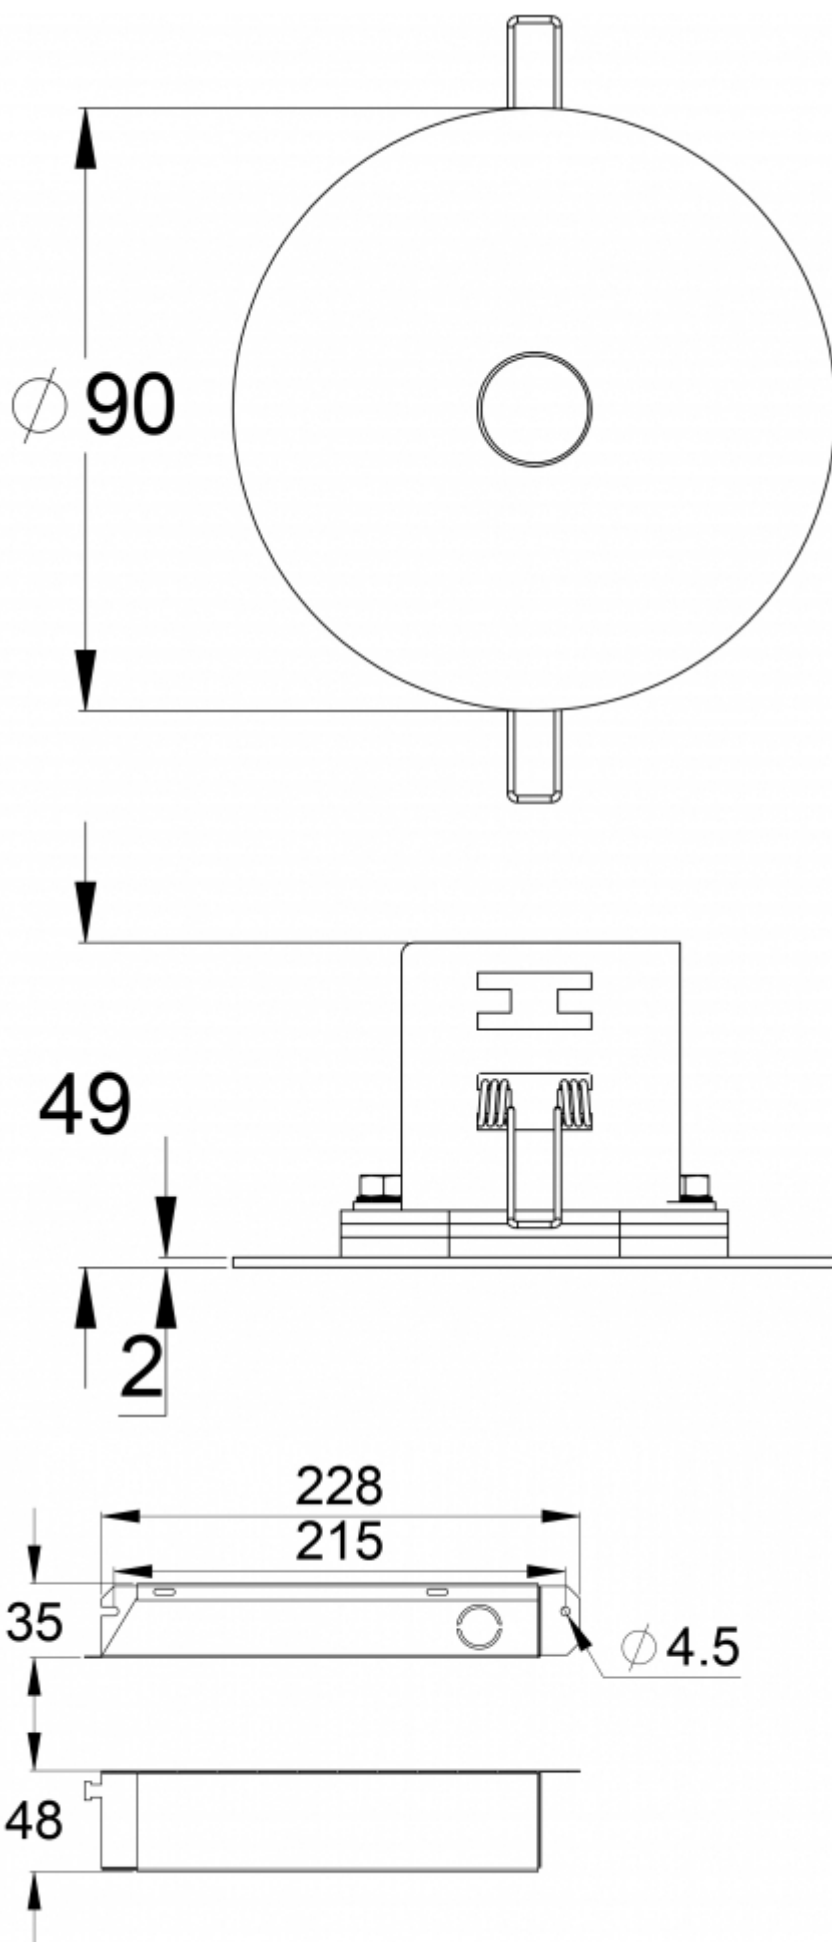

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-41wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-41wk)




Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6351WK



## Addressable 230 V centrally supplied emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT6351WK
Feature	Intelligent Controller, Tapsa Control
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025605
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.4 kg
Max Input Power VA	10 VA
Max Input Power W	5,5 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6351WK

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

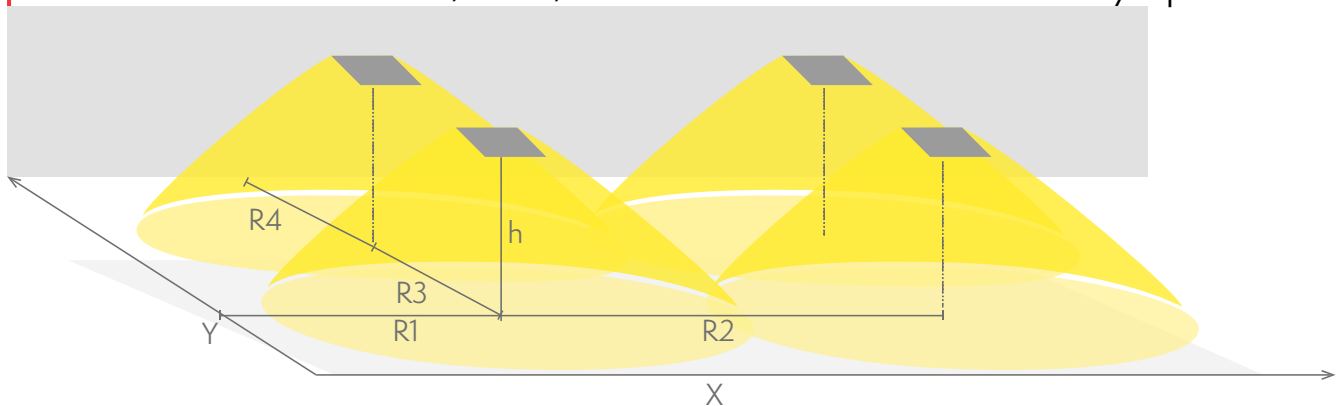

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6351WK

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6351wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

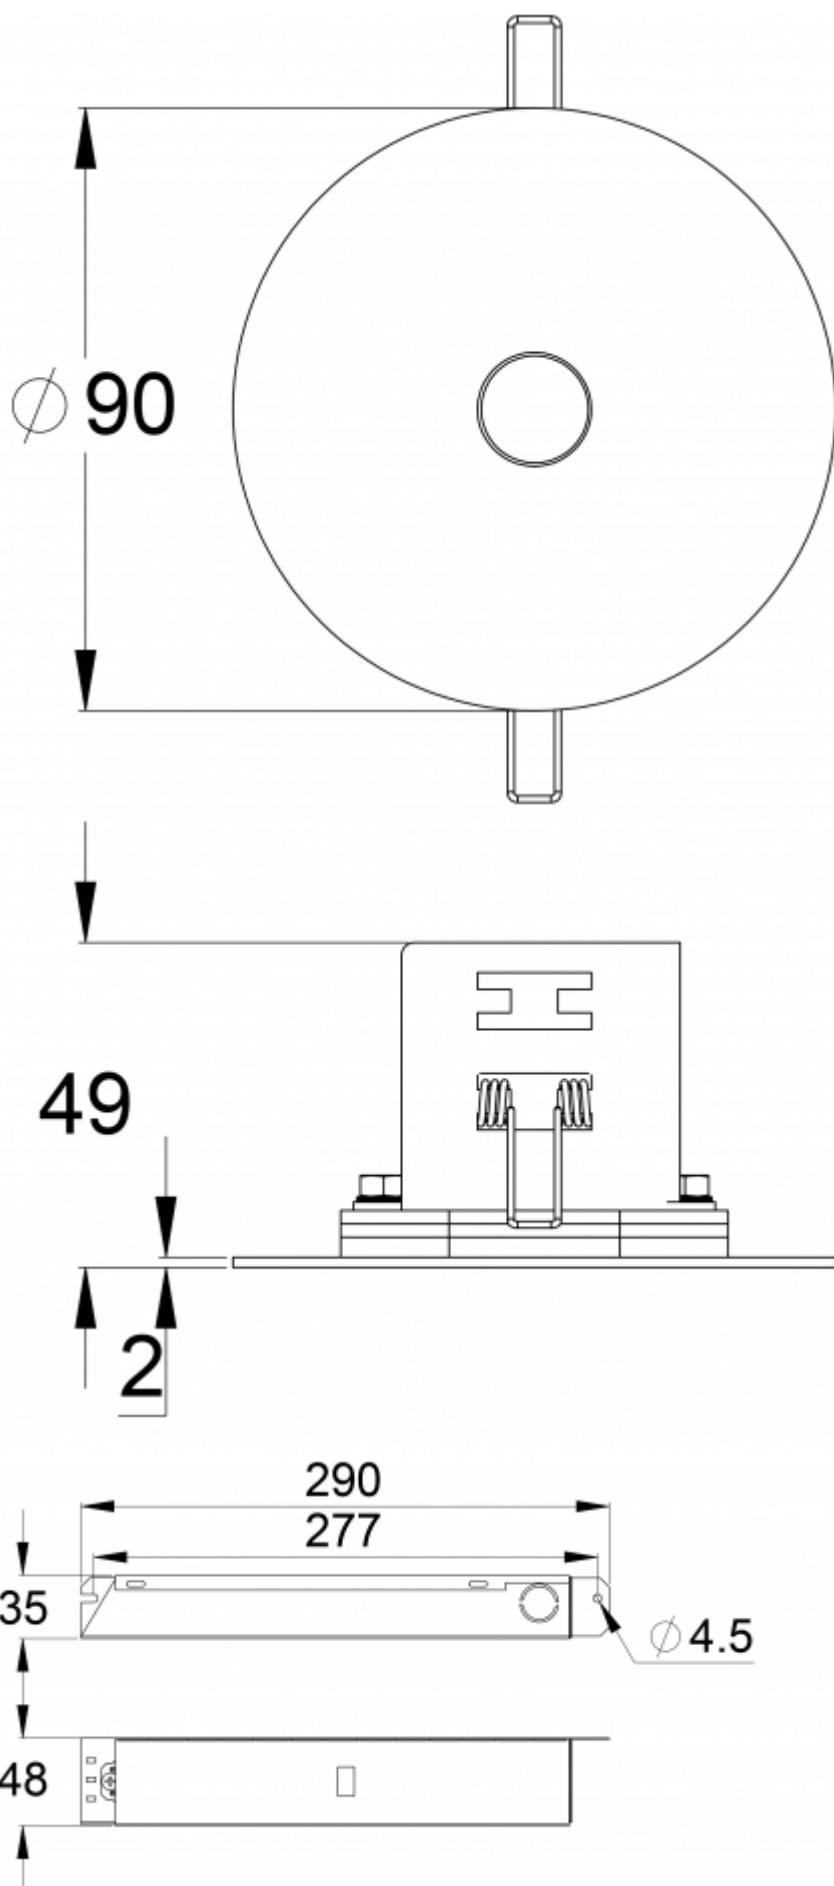

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63)  
51wk



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6352WA

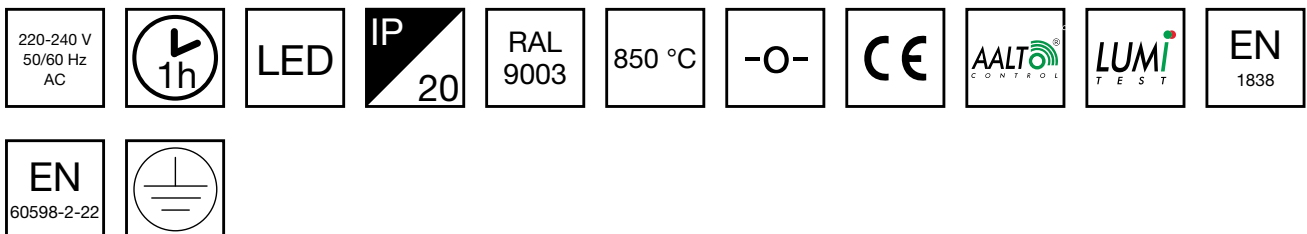

## Self-contained emergency light with 1 h battery and wireless central monitoring

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT6352WA
Feature	Aalto Control, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025643
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.6 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	0...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.


We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa)



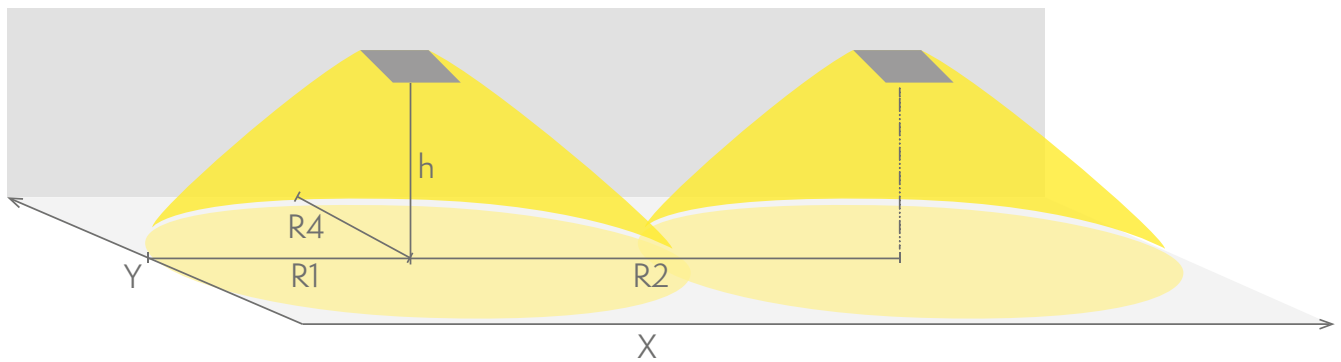

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6352WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

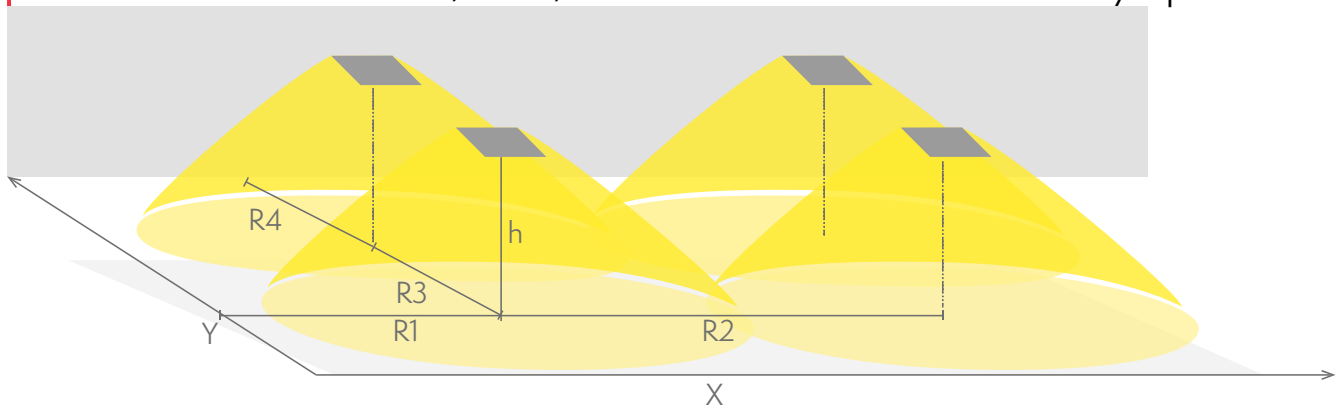

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6352WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland


Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

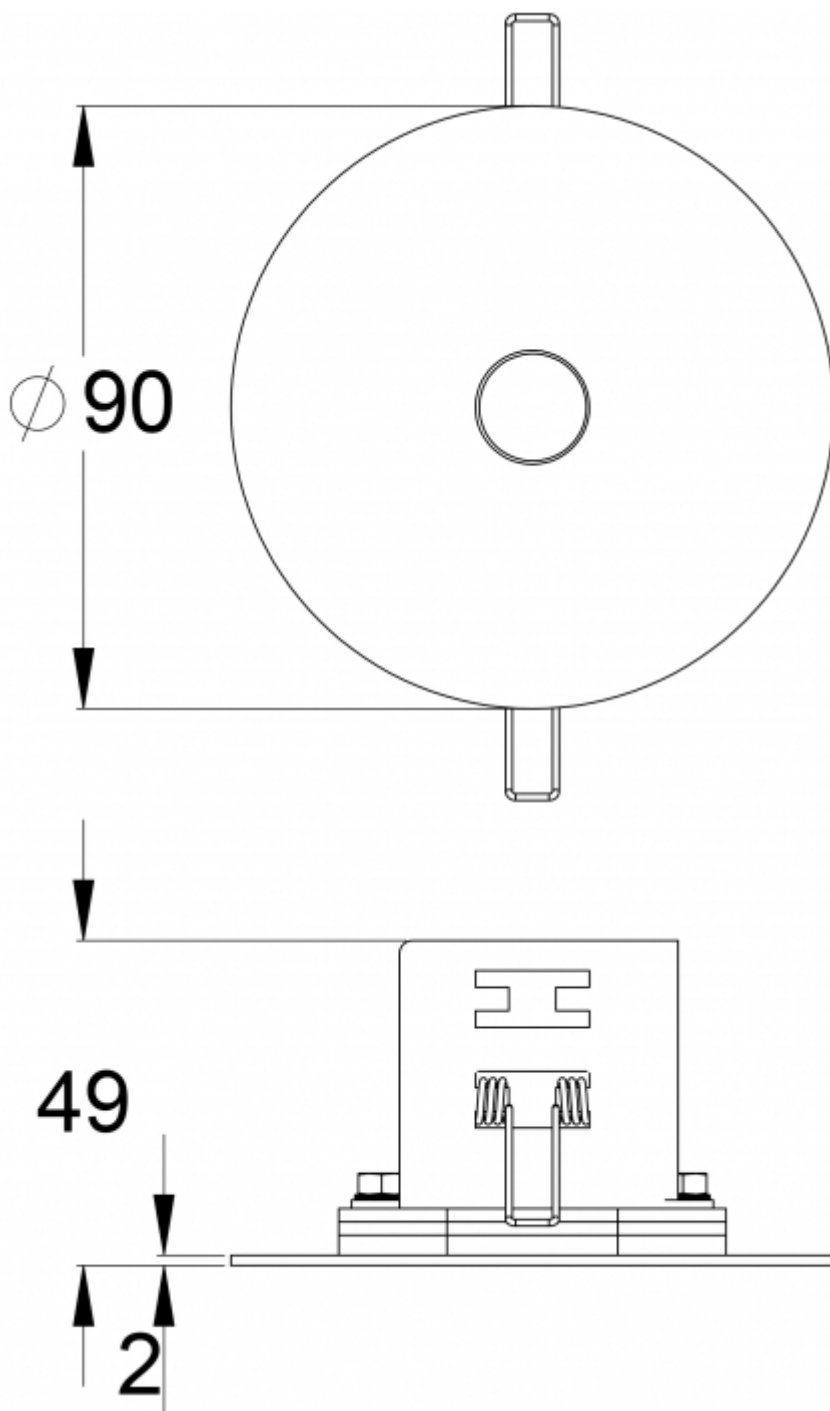

We reserve the rights to make modifications without notice.  
Copyright © 2021 Teknoware. All rights reserved.  
Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

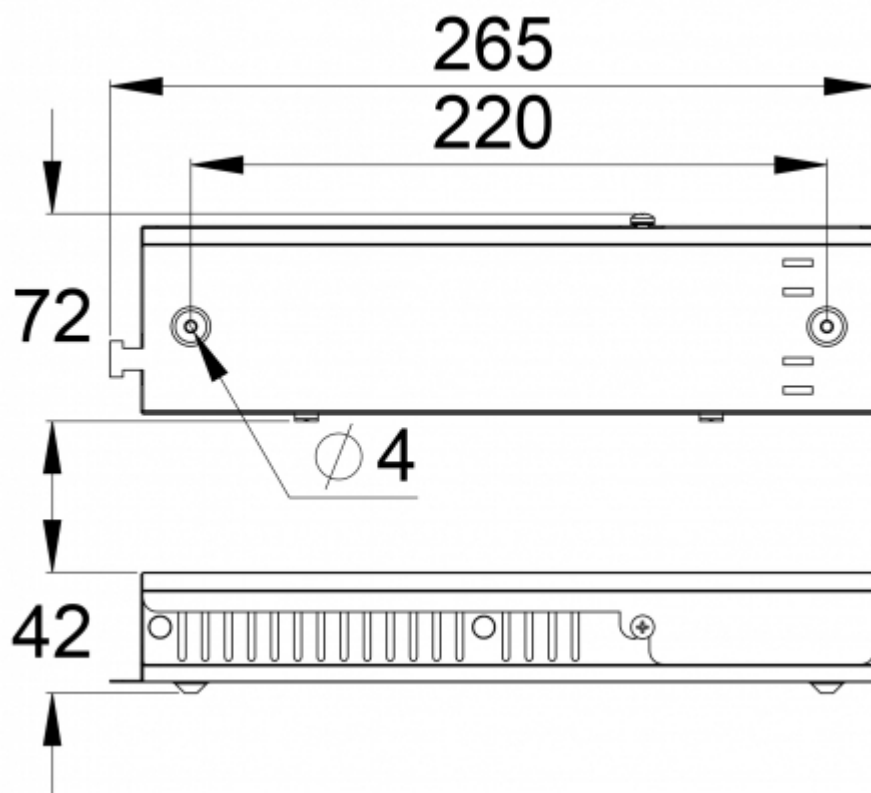


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-52wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-52wa)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6352WM



## Self-contained emergency light with 1 h battery and Lumi Test self-testing

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT6352WM
Feature	Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025636
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.6 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	0...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

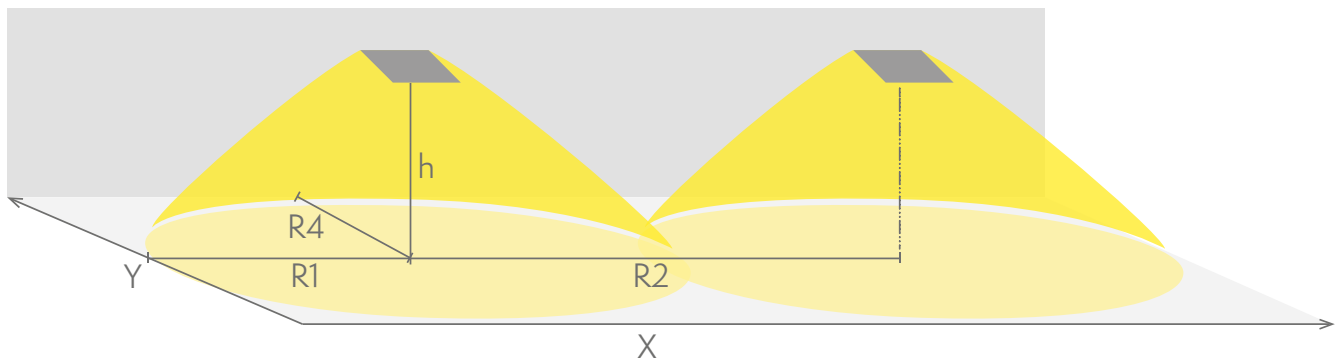

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6352WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

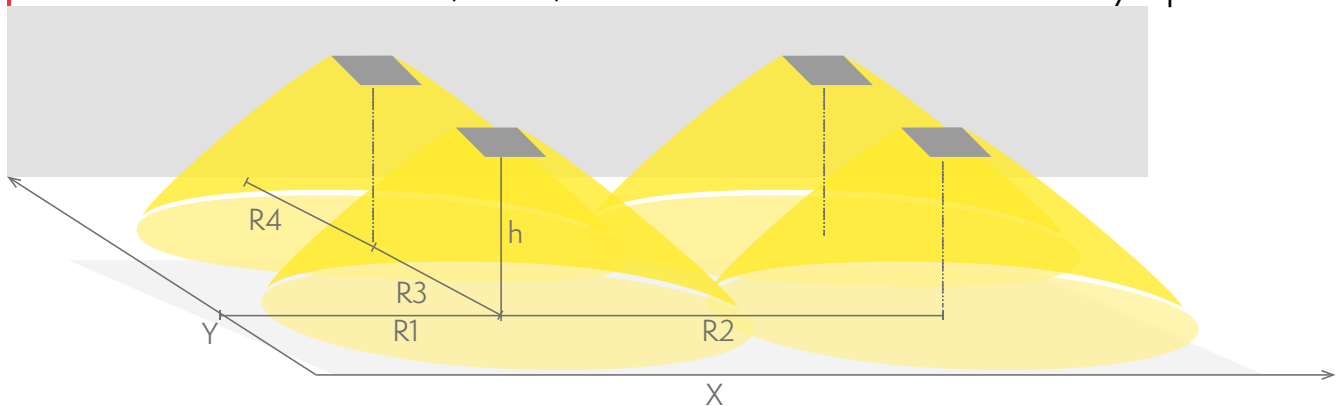

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6352WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6352wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

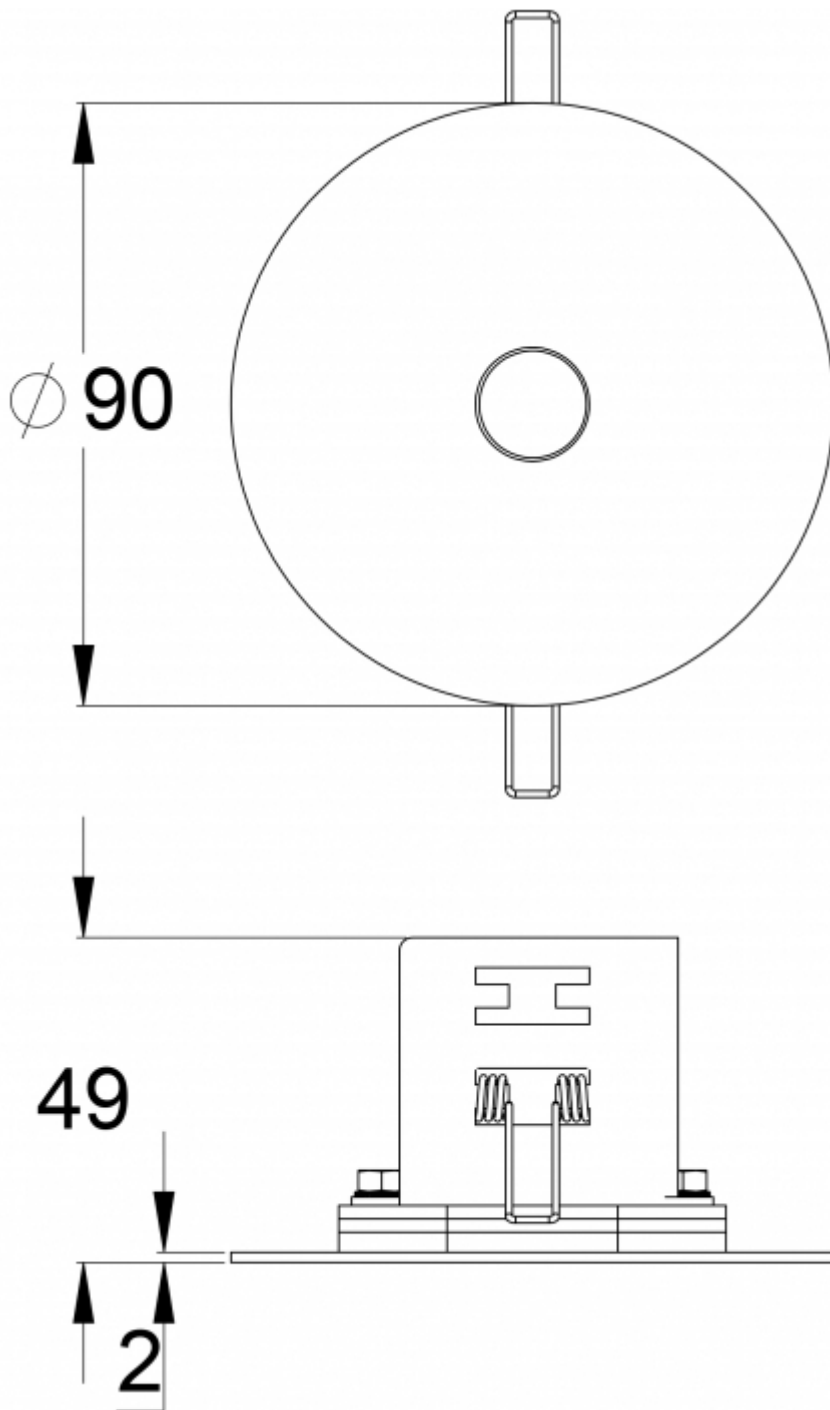


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-52wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-52wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



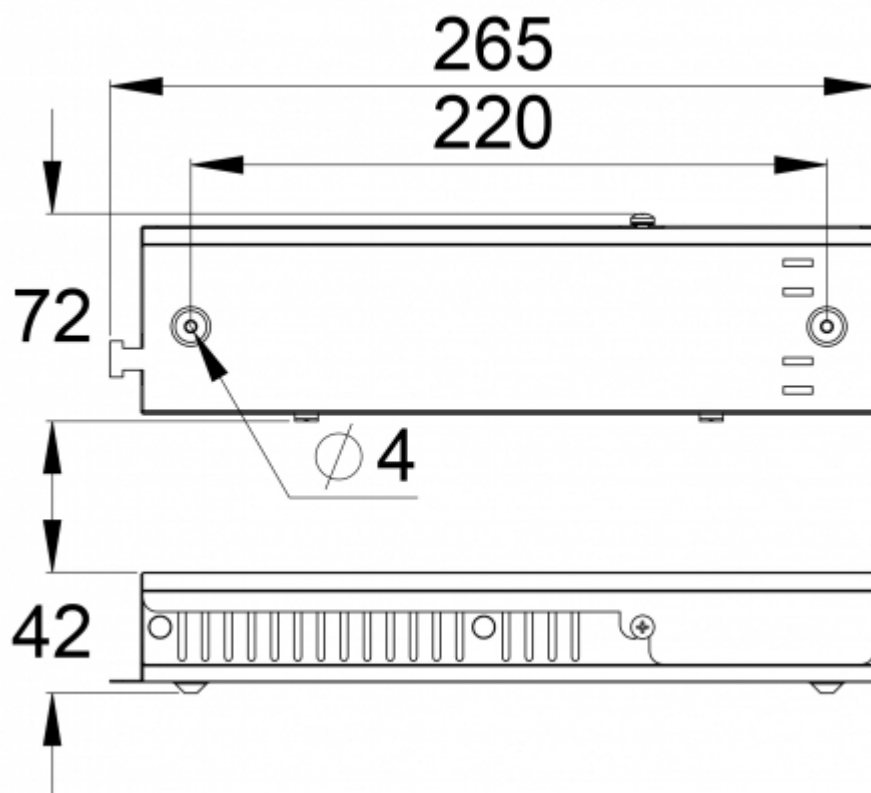


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-52wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-52wm)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6353WA

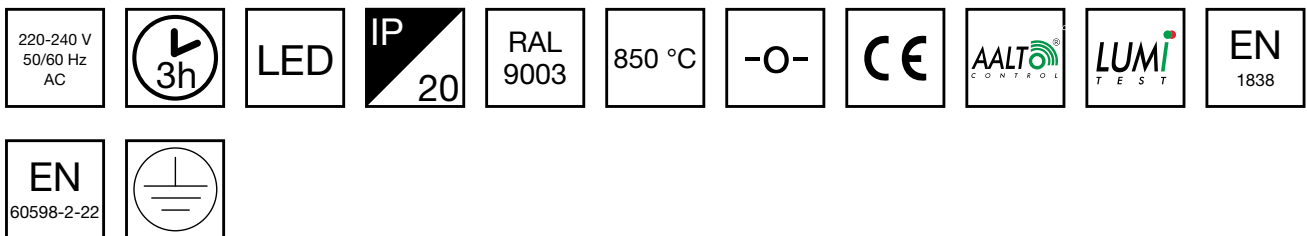

## Self-contained 3 h battery, Aalto Control compatible emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT6353WA
Feature	Aalto Control, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025667
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	3 h
Max Input Power VA	6 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	0...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa)





R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6353WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

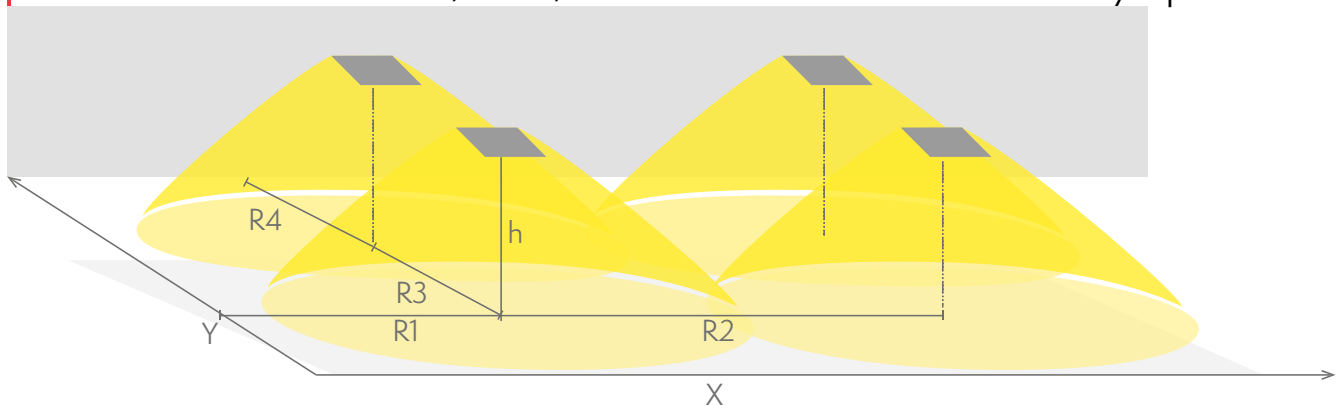

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6353WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland


Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

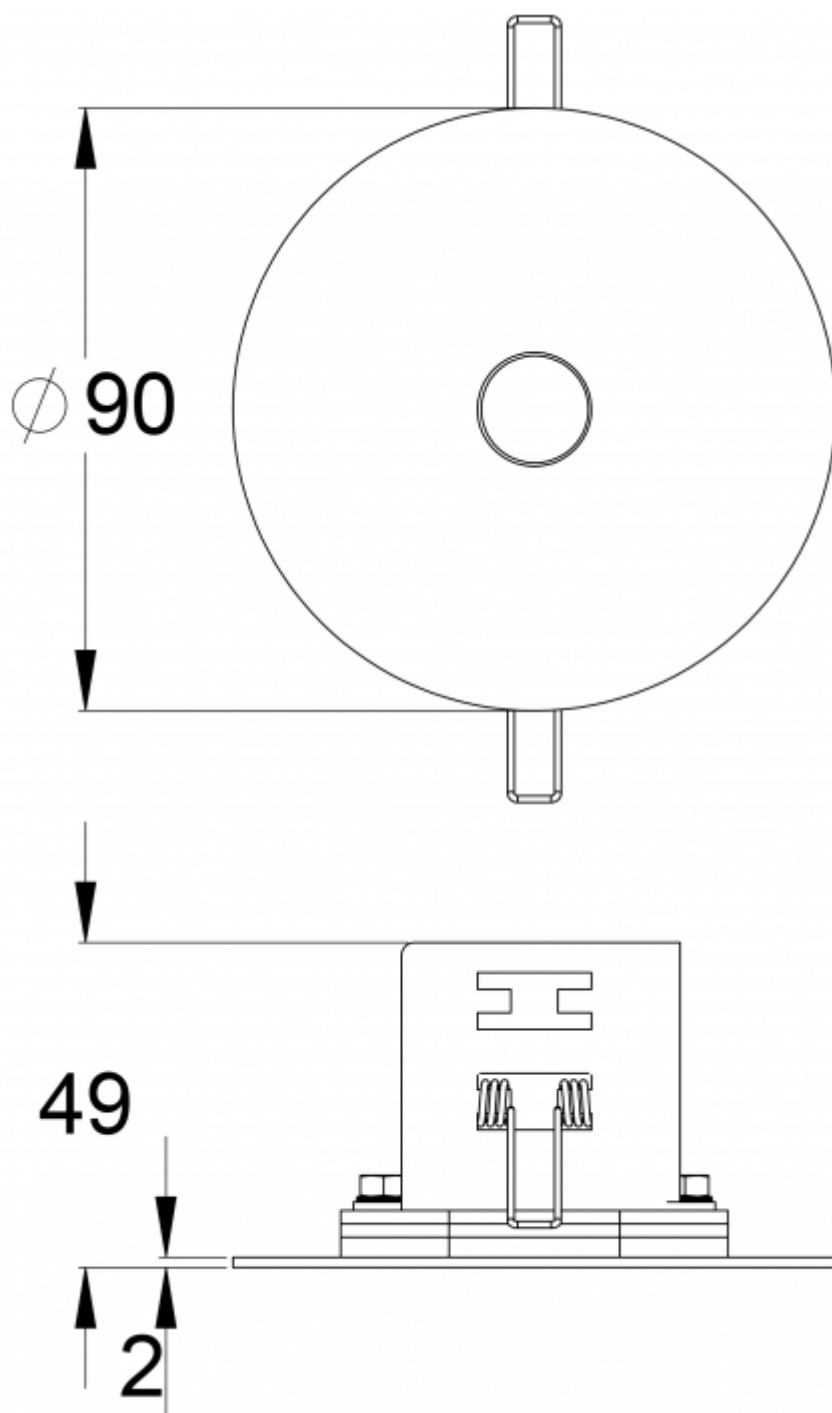

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wa)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



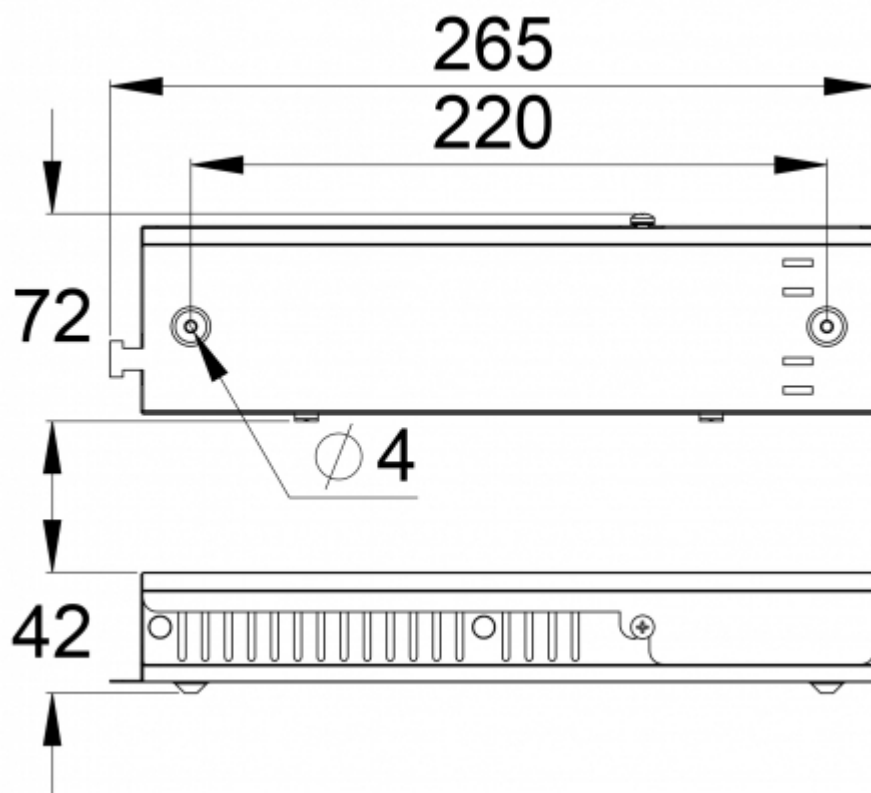


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-53wa](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-53wa)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6353WM



## Self-contained 3 h battery with Lumi Test self-testing emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



Product Code	TWT6353WM
Feature	Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025650
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.8 kg
Backup	3 h
Max Input Power VA	6 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	0...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

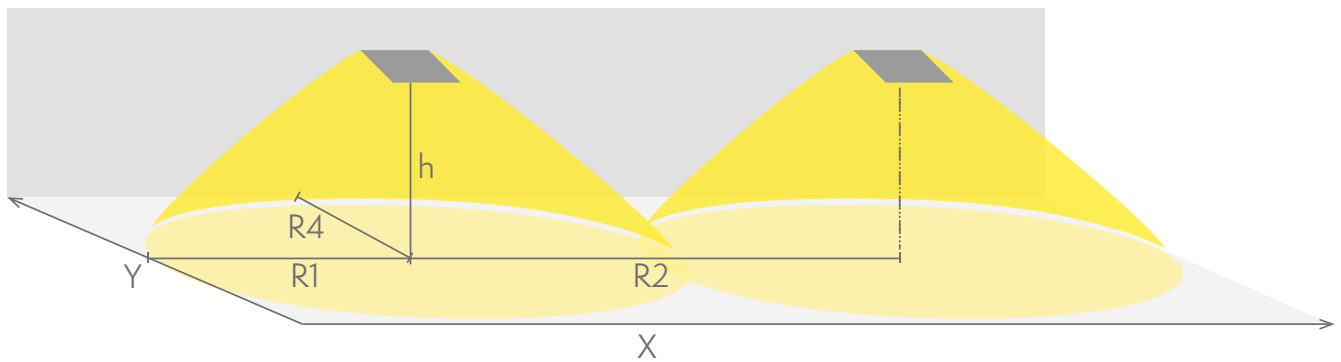

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6353WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

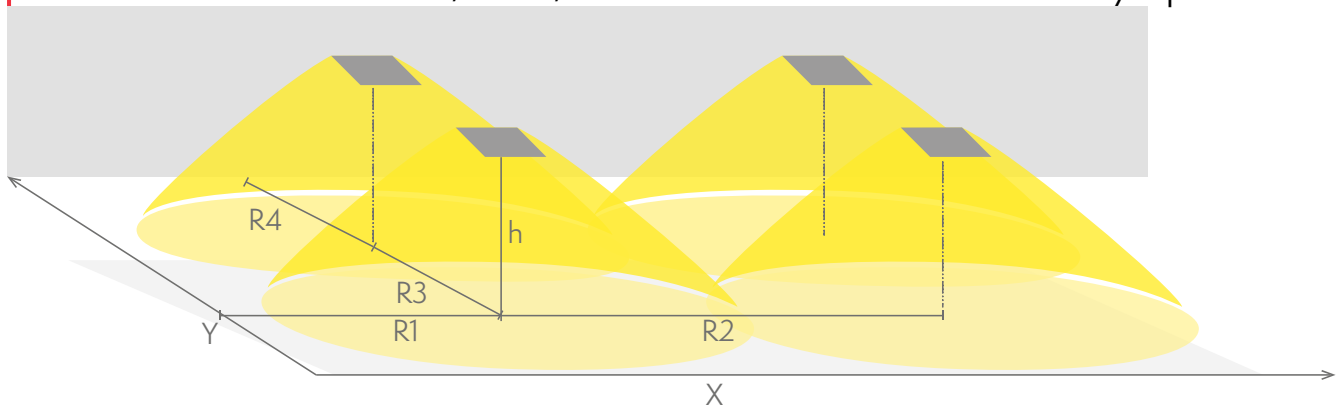

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6353WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland


Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

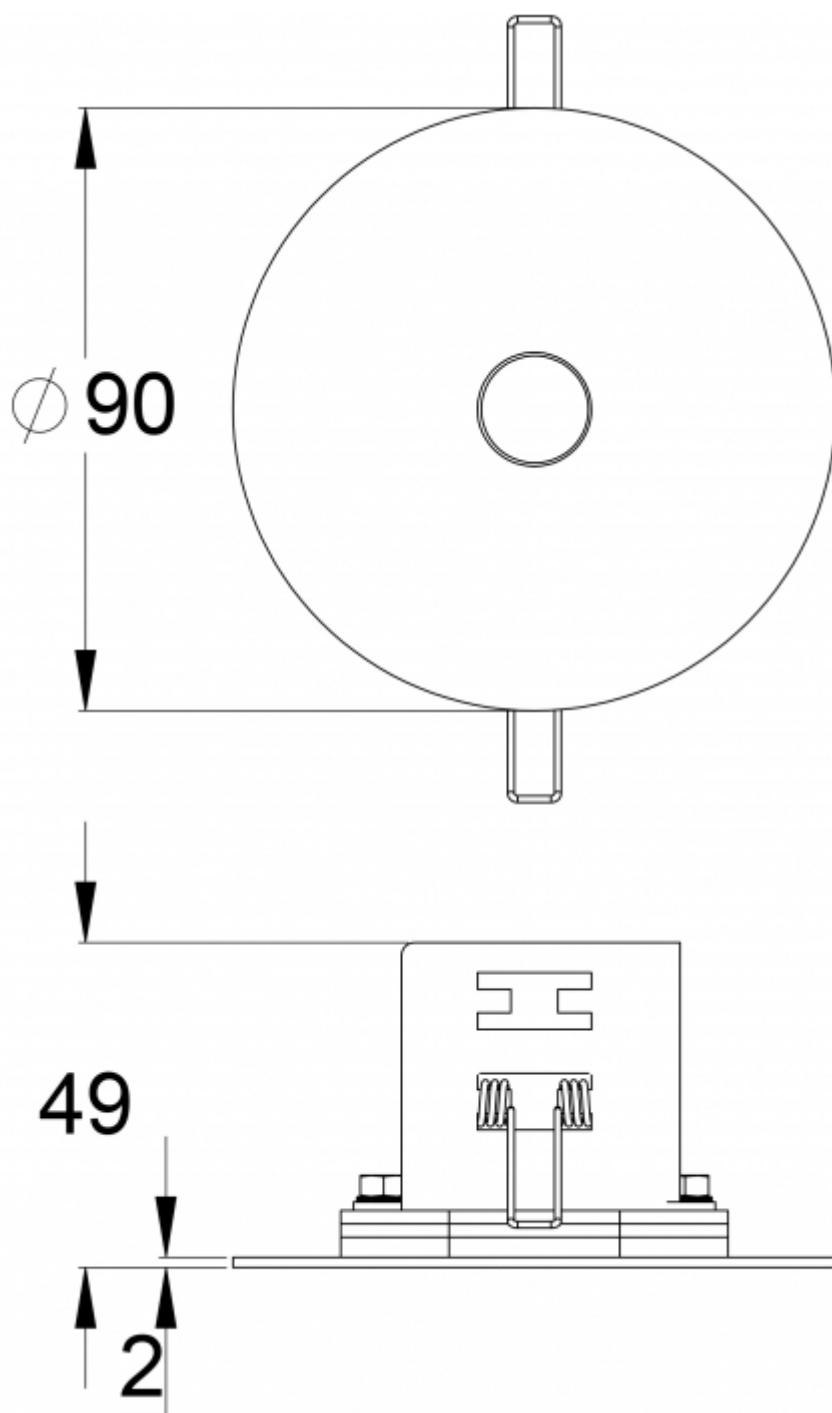

We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6353wm)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



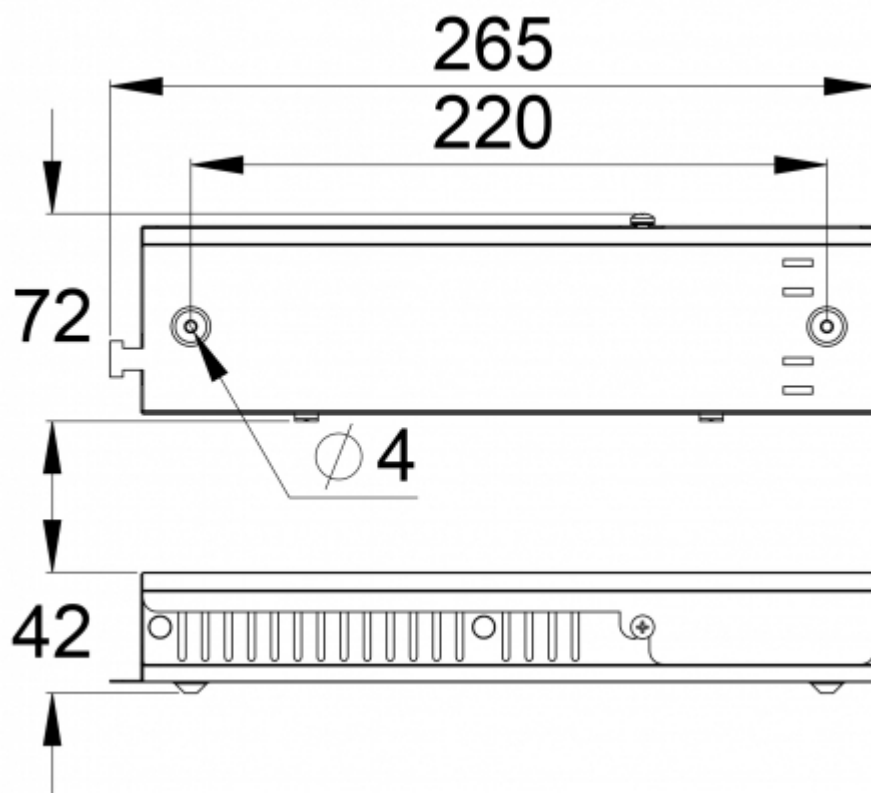


We reserve the rights to make modifications without notice.  
 Copyright © 2021 Teknoware. All rights reserved.  
 Date: January 08, 2021 | Source:  
[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-53wm](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt63-53wm)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
 Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



# SLIMSPOT II ZONE LOWBAY EMERGENCY LIGHT TWT6371W



## 24-230 V centrally supplied emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Zone Lowbay provides a broad, even pattern.

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT6371W
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045025612
ETIM Product Class	EC001957
Length	90 mm
Width	90 mm
Height	46 mm
Weight	0.4 kg
Max Input Power VA	7,5 VA (24 V), 11 VA (230 V)
Max Input Power W	4 W (24 V), 4 W (230 V)
Nominal Supply Voltage	24-230 V, 50/60 Hz AC, DC
Protection Class	III (24 V), I (230 V)
IP Class	IP20
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Light Source	LED
Body Material	metal
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	2 x 2,5 mm <sup>2</sup> (24 V), 3 x 2,5 mm <sup>2</sup> (230 V)
Luminous Flux	200 lm

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.


Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

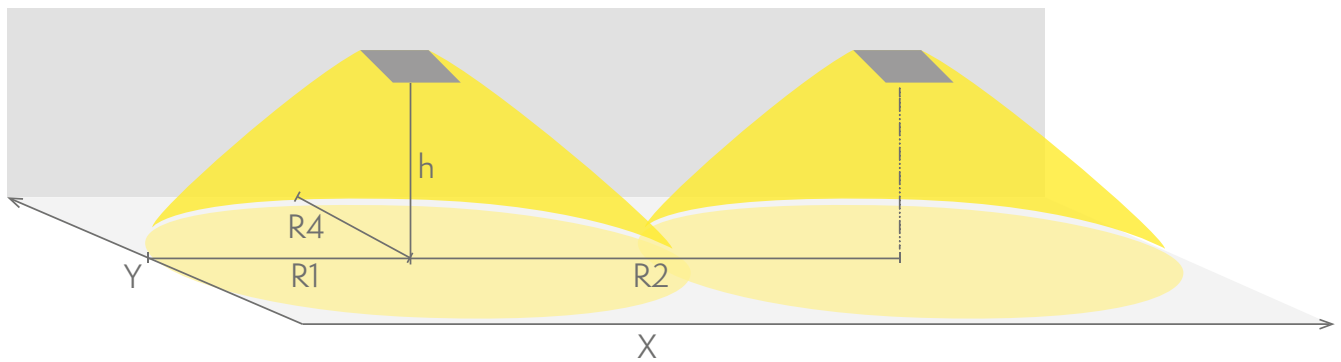

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT6371W

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	4,3	5	11	5
4	1,7	4	14	4

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

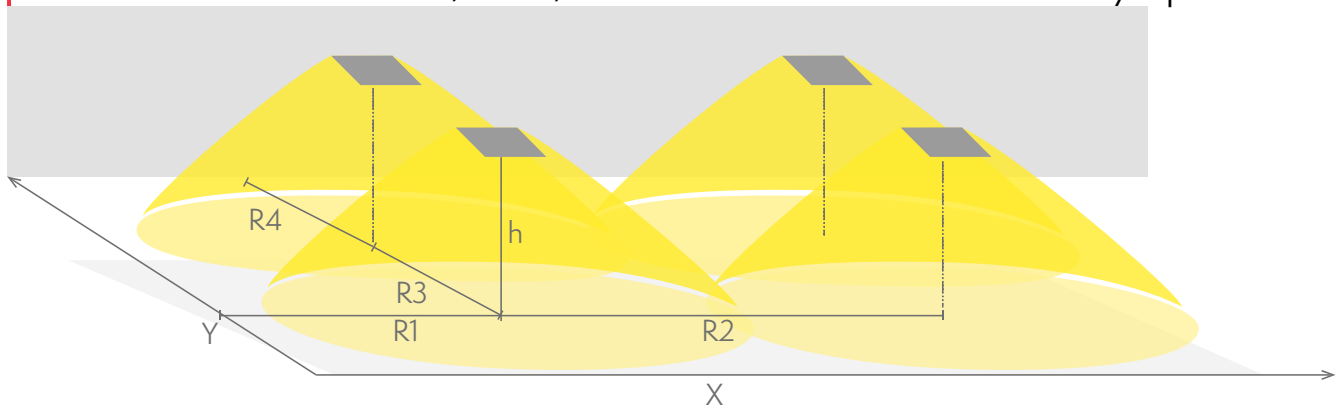

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWT6371W

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	4,3	5,5	10	10	5,5

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
4	1,7	6	11	11	6

---

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.


Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

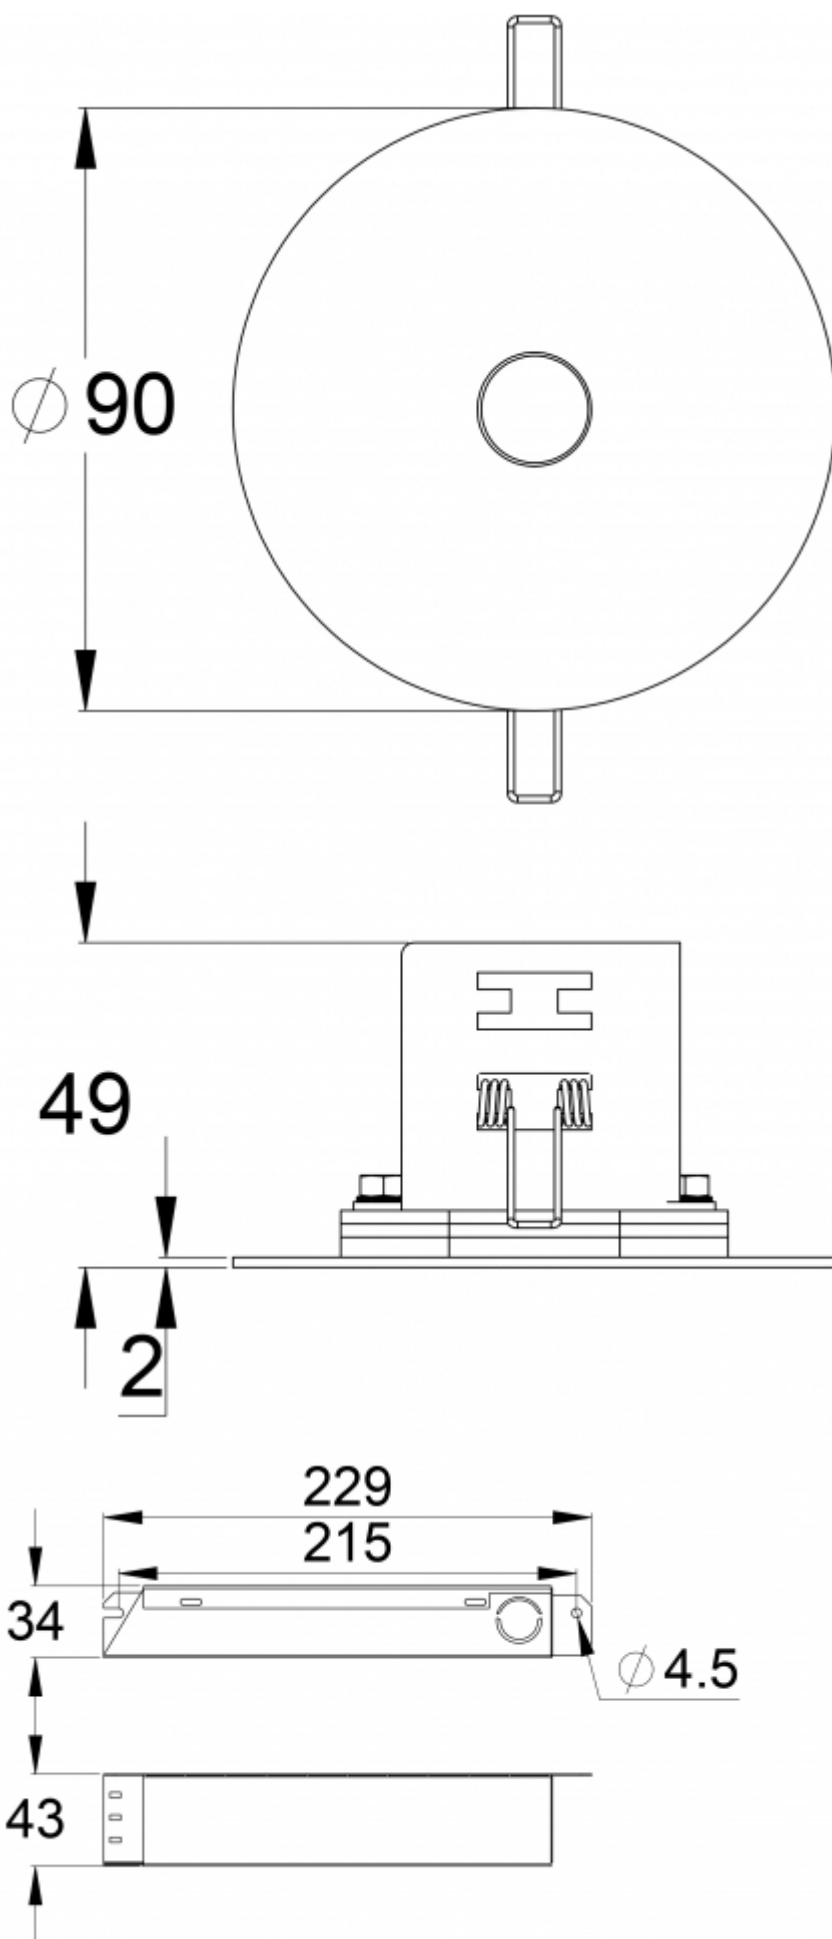

We reserve the rights to make modifications without notice.

Copyright © 2021 Teknoware. All rights reserved.

Date: January 08, 2021 | Source:

[www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w](http://www.teknoware.com/en/emergency-lighting/slimspot-ii-zone-lowbay-emergency-light-twt6371w)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)